

10" HD DIGITAL MONITOR

ORL0224000

Monitor HLED 10" SingleView 1m MRB

- Compatible with HMOS DigiCoax cameras
- Operating temperature -40 to +85 ° C
- Designed for demanding industrial environments
- Real-time operation



PRODUCT DESCRIPTION

SPECIFICATIONS


Display Size	10,1 en
IP Class	IP54
Resolution	WXGA 1280 x RGB x 800
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Digital
Vibration Resistance	50G

Power cable open wired (Secure the power input with a 5A fuse)

1 = Red	= Video power in: 12V/24V
2 = Blue	= Aux 1
3 = Brown	= Aux 2
4 = White	= Power 0V in
5 = Grey	= CAN-H
6 = Yellow	= CAN-L
7 = White/yellow	= N.C.

Video cable front side molded 4p + Coax female connector:

1 = Black	= 0V
2 = Red	= Power
3 = Yellow	= Aux 1
4 = Grey	= Aux 2
5 = Coax core	= Video
6 = Coax shield	= Video GND
Shielding	= To housing

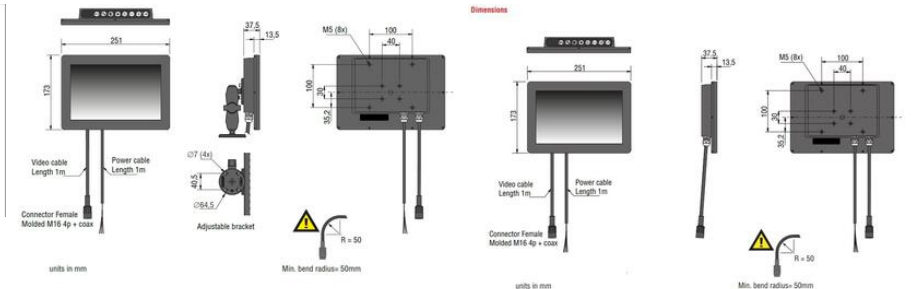

Power cable open wind (Secure the power input with a SA fuse)

- 1 = Red = Video power in: 12V/24V
- 2 = Blue = Aux 1
- 3 = Brown = Aux 2
- 4 = White = Power OV in
- 5 = Grey = CAN-H
- 6 = Yellow = CAN-L
- 7 = White/yellow = N.C.




Video cable front side molded 4p + Coax female connector:

- 1 = Black = OV
- 2 = Red = Power
- 3 = Yellow = Aux 1
- 4 = Grey = Aux 2
- 5 = Coax core = Video
- 6 = Coax shield = Video GND
- Shielding = To housing




Dimensions



Connector Female
Molded M15 4p + coax

units in mm



Min. bend radius=50mm