

ORLACO - DYNAMIC-/ MAST CABLE

ORL0304371

Mast cable 0,5m 4P Molded, 4pM - 4pF

- Soft surface with a small bend radius
- M16 4-pole cast contacts or M16 7-pole cast contacts
- -40 to +85 °C



PRODUCT DESCRIPTION

Suitable for use in moving applications, for example, for a gear camera mounted on an arm, a excavator boom or on a truck with a tipping platform. Works well in the mast on your truck.



SPECIFICATIONS

Cable Diameter	9 mm
Cable length	500 mm
IP Class	IP67
Material	PUR
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Analogue





Electrical connection

1 = coax core Video
2 = coax shielding Video GND
3 = red 12...30V/DC
4 = black 0V
Orange N.C.
Yellow N.C.
Grey N.C.

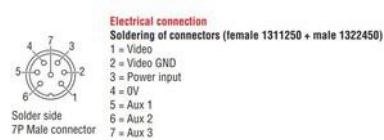



Electrical connection

Soldering of connectors (female 1311250 + male 1322450)
1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3




Dimensions

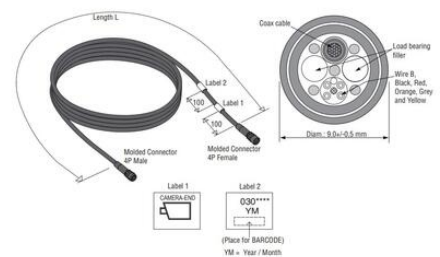




Units in mm




Front side
4p Male connector



Front side
4p Female connector

Electrical connection

- 1 = coax core Video
- 2 = coax shielding Video GND
- 3 = red 12...30V/DC
- 4 = black 0V
- Orange N.C.
- Yellow N.C.
- Grey N.C.




Solder side
7P Male connector




Solder side
7P Female connector

Electrical connection
Soldering of connectors (female 1311250 + male 1322450)

- 1 = Video
- 2 = Video GND
- 3 = Power input
- 4 = 0V
- 5 = Aux 1
- 6 = Aux 2
- 7 = Aux 3



Dimensions

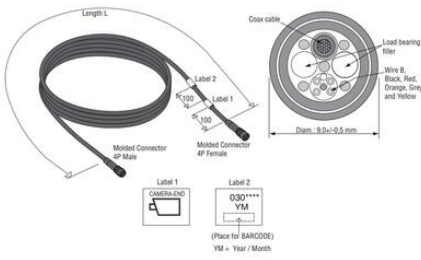

Units in mm

