

ORLACO - DYNAMIC-/ MAST CABLE

ORL0301731

MAST CABLE 15m 4P Molded

- Soft surface with a small bend radius
- M16 4-pole cast contacts or M16 7-pole cast contacts
- -40 to +85 °C











PRODUCT DESCRIPTION

Suitable for use in moving applications, for example, for a gear camera mounted on an arm, a excavator boom or on a truck with a tipping platform. Works well in the mast on your truck.

SPECIFICATIONS

| | |
|------------------------|----------|
| Cable Diameter | 9 mm |
| Cable length | 15000 mm |
| IP Class | IP67 |
| Material | PUR |
| Temperature range from | -40 °C |
| Temperature range to | 85 °C |
| Type | Analogue |

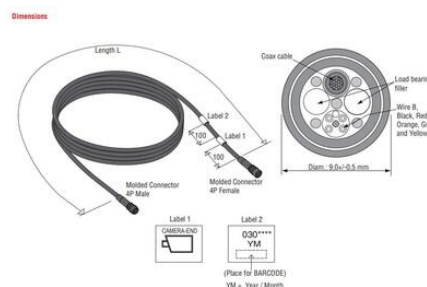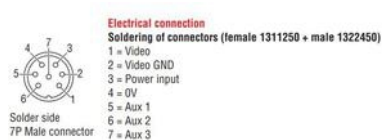

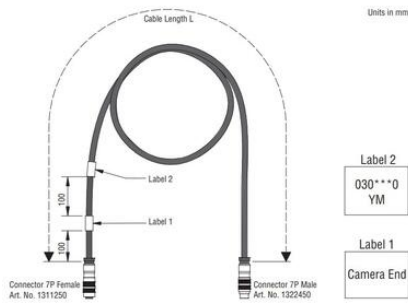

Electrical connection

1 = coax core
2 = coax shielding
3 = red
4 = black
Orange
Yellow
Grey


Video
Video GND
12...30V/DC
0V
N.C.
N.C.
N.C.



Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

