

ORLACO - MULTI CABLE

ORL0301960

MULTICABLE 1m, 4pM - 4pF

- 4-pole and 7-pole M16 cast contacts
- Developed by Orlaco for best EMC protection
- -40 to +85 °C



PRODUCT DESCRIPTION

Orlaco develops its own cabling for the best possible image and EMC protection. Molded contacts make them well protected from moisture. The multi cable is intended for static mounting.


If you would like a cabling to be used for a mobile application, take a look at the range of our Dynamic Cabling.

SPECIFICATIONS

Cable Diameter	6 mm
Cable length	1000 mm
IP Class	IP67
Material	PVC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Analogue




Front side female connector



Front side male connector

Electrical connection

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND



Front side molded 7P Female connector





Front side molded 7P Male connector


Electrical connection molded connectors

- 1 = Coax Core
- 2 = Coax Shield
- 3 = Red (Power input)
- 4 = Black (0V)
- 5 = Orange (Rx)
- 6 = Yellow (Tx)
- 7 = Grey (Aux)

Dimensions

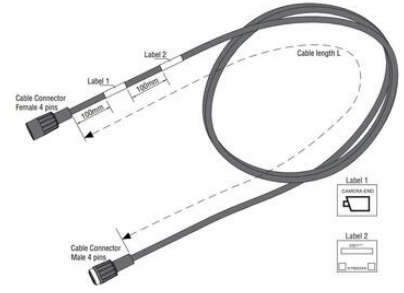


Front side female connector




Front side male connector

Electrical connection

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND



Front side molded 7P Female connector



Front side molded 7P Male connector

Electrical connection molded connectors

- 1 = Coax Core
- 2 = Coax Shield
- 3 = Red (Power input)
- 4 = Black (0V)
- 5 = Orange (Rx)
- 6 = Yellow (Tx)
- 7 = Grey (Aux)

Dimensions

