

## DATALOGIC - VISION SENSOR DATAVS2 REID

DATAVS2-06-REID  
Vision sensor 6mm LENS ID

- Controls for bar code, Datamatrix and OCV
- Memory for up to 20 different inspections
- 3 outputs
- R232 interface



### PRODUCT DESCRIPTION

DataVS2 is a series of Vision sensors for flexible solutions for machine applications.

The sensor is complete with optics, red LED lighting and electronics in a compact housing. The parameters in the sensor are set via PC through Ethernet communication. The software comes with the sensor and is developed to lead the user step by step through parameter setting. DataVS2 is available in 4 different versions with different control instruments.

Identification ID - Reads bar codes, datamatrix and OCV.



### TECHNICAL DATA

<b>Supply voltage</b>	24 V DC $\pm 10\%$
<b>Ripple</b>	1Vpp max. with lighting 2Vpp without lighting
<b>Current consumption</b>	100 mA at 24 VDC (without lighting)
<b>Output type</b>	3 PNP, 100 mA max.
	RS232
<b>Resolution</b>	640x480 (VGA)
<b>Network interface</b>	M12 4-pole Ethernet 10/100 Mbps
<b>Interface external lighting</b>	Strobe signal (24 V PNP N.O)
<b>Frame rate</b>	60 fps
<b>optics</b>	integrated (6 mm/8 mm/12 mm/16 mm)

<b>Indication</b>	4 LED
<b>Connection</b>	M12 8-pole A-coded M12 4-pole D-coded
<b>IP-class</b>	IP50
<b>Encapsulation material</b>	Aluminium alloy/ABS
<b>Weight</b>	125 g
<b>Working temperature</b>	-10 to +50 °C
<b>Storage temperature</b>	-25 to +70 °C


## CONTROL INSTRUMENTS




## READ FIELD

### Read field

Working distance (mm)	Read field (Width x Height) in mm			
	DATAVS2-16-DE-xxx	DATAVS2-12-DE-xxx	DATAVS2-08-DE-xxx	DATAVS2-06-DE-xxx
50	-	17 x 12	25 x 20	42 x 30
80	-	25 x 20	40 x 30	60 x 41
110	-	33 x 25	55 x 40	80 x 55
140	31 x 24	45 x 35	70 x 50	98 x 69
170	39 x 29	53 x 38	85 x 60	118 x 83
200	46 x 34	60 x 50	100 x 70	138 x 92
300	70 x 53	90 x 65	145 x 103	201 x 140
400	94 x 71	121 x 82	186 x 132	265 x 189
500	118 x 89	150 x 110	236 x 167	330 x 232
600	143 x 107	185 x 130	282 x 232	385 x 270



## DIMENSIONS

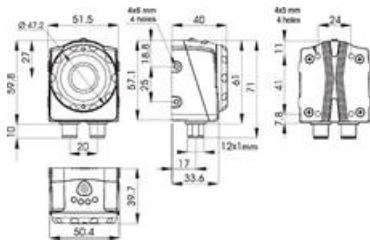

## CONNECTION



M12 4-pole Ethernet



- 1 = white = 10/100
- 2 = orange = 150
- 3 = green = 150
- 4 = purple = 150

M12 8-pole (power supply and I/O)



- ORJ and NOR models
- 1 = white = Digital input 1
  - 2 = brown = 24 Vdc
  - 3 = green = configurable output
  - 4 = yellow = output 1
  - 5 = pink = output 2
  - 6 = blue = output 3
  - 7 = blue = GND
  - 8 = red = external trigger

- Q and PR2 models
- 1 = white = RS232 TX
  - 2 = brown = 24 Vdc
  - 3 = green = configurable output
  - 4 = yellow = output 1
  - 5 = pink = output 2
  - 6 = blue = RS232 RX
  - 7 = blue = GND
  - 8 = red = external trigger

## ORDER NUMBER

Order number	Description	Output
DATAVS2-06-REID	6 mm lens, ID	3 outputs, RS232
DATAVS2-08-REID	8 mm lens, ID	3 outputs, RS232
DATAVS2-12-REID	12 mm lens, ID	3 outputs, RS232
DATAVS2-16-REID	16 mm lens, ID	3 outputs, RS232
DATAVSCVRJ45D03	Ethernet cable 3m	

## DOWNLOAD

Data sheet	<a href="#">Download</a>
Manual	<a href="#">Download</a>


## SPECIFICATIONS

Electrical connection	M12 4 pole D-coded, M12 8 pole connector
Frame Rate	60
IP Class	IP50
Lens material	ABS plastic
Material Protection	Aluminium
Output	3xPNP, RS232
Output current max	0,1 A
Power consumption max	0,1 A
Resolution	640x480 (VGA)
Temperature range from	-10 °C
Temperature range to	50 °C

Voltage DC max 24 V

Voltage DC min 24 V

Voltage Tolerance 10%

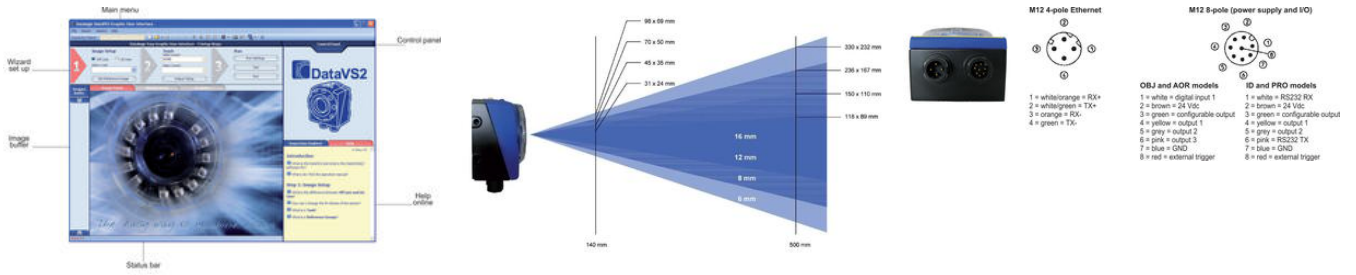

**Step 1: Image Setup**

The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorize the image that will be used as a template during sensor functioning.

**Step 2: Teach**

The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry-out.

**Step 3: Run**

The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnostics.

