


## SR ROPE PULL SWITCH

601.1629.071

Cable pull switch SR-U2Z-0-QF-175-L0-0-0

- Rope length capabilities between 1-75 metres
- 2 NC+2 NO default
- Wire quick fix (QF versions)
- Wire tension indicator
- Robust design

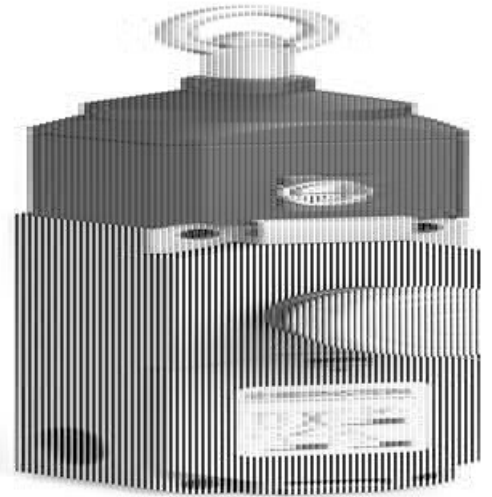


### PRODUCT DESCRIPTION

Bernstein rope pull switch systems are ideally suited for emergency stop applications. The SR / SRM rope pull switch range offers a rugged plastic (SR) or metal (SRM) rope pull switch featuring an emergency stop impact button and integrated inspection window. The integrated window on both SR & SRM rope pull switches allows for easy checking of cable tension during installation.

Features:

- Enclosure/Cover SR - PA 6 GV (UL94-V0)
- Enclosure/Cover SRM - Die-cast aluminium
- Actuator - Die-cast Zinc / Steel
- Conforms to IEC 947-5-5, DIN EN 60947-5-5 and ISO 13850
- Quick fix quick-connect system makes eye stiffeners, cable grips and turnbuckles redundant
- Integrated inspection window enables checking of cable tension during installation
- 3 x M20 x 1.5 cable entries
- Protection class IP 67 according to IEC/EN 6052
- Mechanical service life = up to 1Mio

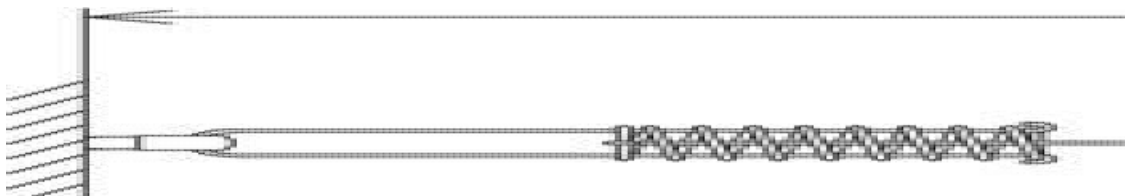

### SPECIFICATIONS

<b>Contact type</b>	2 NO, 2 NC
<b>Lin length max</b>	37,5 m
<b>IP Class</b>	IP67
<b>Temperature range from</b>	-25 °C

<b>Temperature range to</b>	70 °C
<b>Height</b>	294 mm
<b>Width</b>	42,5 mm
<b>Depth</b>	76,8 mm
<b>Cable entry</b>	3x M20x1,5
<b>Voltage Max</b>	250 V
<b>Material of body</b>	PA6
<b>B10d</b>	100 000
<b>Approvals</b>	CCC, cCSAus, DGUV

