


SOCKETS FOR C3 INDUSTRIAL RELAYS

3-pole

S3B
SOCKET 11 PIN DIN RAIL MOUNT

- Both DIN and EN connection numbering
- Semi-protected
- Can be equipped with S3BC code system
- Integrated retaining bow

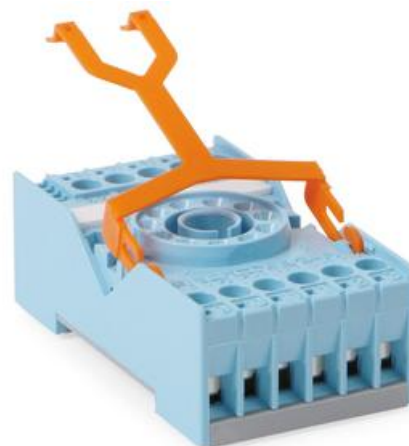

PRODUCT DESCRIPTION

SPECIFICATIONS

Switching Capability Voltage	250 V
Breaking Capacity Current	10 A
Isolation conn./conn.	2500 V
Isolation connection/rail	2500 V
Material	Lexan
Torque Connection	0,7 Nm
Screw size	M3, Pozi
Cross section stranded	0,35-2,5 mm ²
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range to	60 °C
Weight	55 g

