

## TIMER MODULE FOR C3 RELAYS

CT3E30L

Time Cube 11 Pin Delay On 20-65V ac/dc

- Provides 3 change-over contacts
- Wide input voltage range, AC/DC
- Multi-time 0.2 s – 30 min.




### PRODUCT DESCRIPTION

#### Example of use

The CT3 Timecube is an electronic timer that is inserted between the plug-in industrial relay and the socket. This combination is a modular complete time relay without additional space requirement. It offers up to three changeover contacts with a variety of signal contacts and power contacts.

The Timecubes are suitable for all 8 pin and 11 pin standard industrial relays of the C2 and C3 series according to IEC 67 and also for relays of other manufacturers.


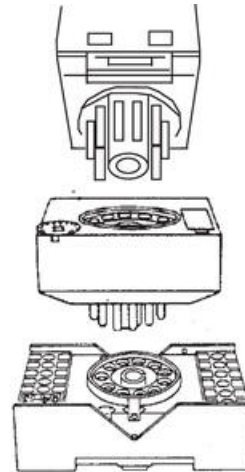


Relay C3-A30  
Time cube CT3  
Socket S3-B

### SPECIFICATIONS

<b>Response time</b>	AC-80 ms / DC-50 ms
<b>Power Consumption</b>	6 mA
<b>Nominal Voltage</b>	20-65 V AC/DC
<b>Leakage current</b>	≤ 0.3 mA

<b>IP Class</b>	IP40
<b>Temperature range bearing, from</b>	-40 °C
<b>Material</b>	Lexan
<b>Temperature range to</b>	60 °C
<b>Weight</b>	35 g
<b>Temperature range bearing, to</b>	70 °C
<b>Temperature range from</b>	-25 °C
<b>Time Range</b>	0,2 s - 30 min
<b>Recovery Time</b>	200 ms
<b>Approvals</b>	CE, CSA, RoHS, UL



**Range**

- 0,2 - 3 s
- 2 - 30 s
- 0,2 - 3 min
- 2 - 30 min


**DIP switch**




**Time**

Adjusting knob  
1 ... 10




**Relä**



**Tidkub**



**Socket**

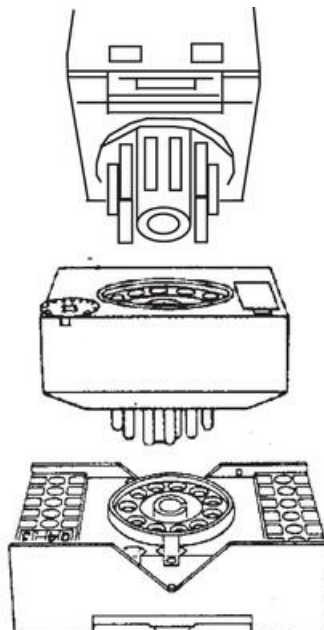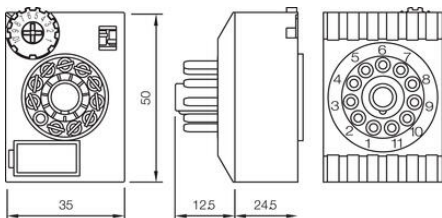

**Range**

- 0,2 - 3 s
- 2 - 30 s
- 0,2 - 3 min
- 2 - 30 min


**DIP switch**




**Time**

Adjusting knob  
1 ... 10

Relä



Tidkub



Socket

