

## C12 INTERFACE RELAY

2-pole 5 A

C12A21X12A

Relay 8 Pin 2 Pole LED 12V ac

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components




### PRODUCT DESCRIPTION

### SPECIFICATIONS


Overvoltage UNX Max	1,1
Voltage Min	0,6 V
Nominal power ac	1,1 VA
Coil Voltage AC	12 V AC
Response Time	10 ms
Working Un	0,8-1,10
Surge Current (20Ms)	15 A
Recommended Min Load	10 mA/10 V
Bounce Time	1
Release Time	5 ms
The Recommended Maximum Load	5 A/250 V AC 1; 0,5A/110 V DC-1
Breaking Capacity Current	5 A
Release Time Kontaktstudtid	8 ms
Switching Capability Voltage	250 V
Number Of Contacts	2
Contact Material	AgNi + 0,2 μ Au
Frequency	50 Hz

<b>IP Class</b>	IP40
<b>Optional Coil</b>	X (LED)
<b>Isolation Contact / Coil</b>	5000 V
<b>Weight</b>	21 g
<b>Isolation Contact / Contact</b>	3000 V

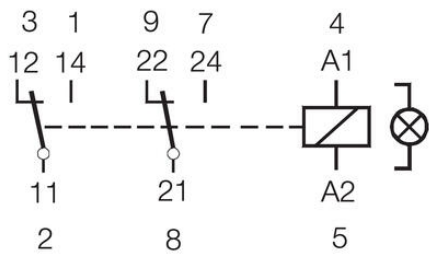


# C12-A21X

5A 250V AC-1  
5A 30V DC-1



A2 — A1

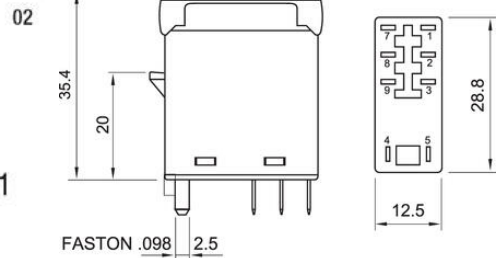

**CE EAC**  
Made in India

