

## C9 MINIATURE RELAY

4-pole 5 A

C9A4124A

Relay 14 Pin 4 Pole 0.2 $\mu$  Au 24V ac

- Colour-coded test button, both lockable and non-locking
- Marking system
- Mechanical indication





### PRODUCT DESCRIPTION

### SPECIFICATIONS

OFF-Voltage Un Max	0,25
Nominal power ac	1,2 VA
Coil Voltage AC	24 V AC
Working Un	0,8-1,1
Surge Current (20Ms)	15 A
Recommended Min Load	10 mA/10 V
Resistive Load 110 V DC Max	50 W
Release Time	6 ms
The Recommended Maximum Load	5 A/250V AC-1; 5 A/30 V DC-1
Breaking Capacity Current	5 A
Release Time Kontaktstudstid	7 ms
Switching Capability Voltage	250 V
Number Of Contacts	4
Contact Material	AgNi + 0,2 $\mu$ Au
Resistive Load 24 V dc Max	100 W
Frequency	50 Hz
IP Class	IP40

Temperature range bearing, from	-40 °C
Isolation Contact / Coil	2000 V
Temperature range to	60 °C
Weight	43 g
Temperature range bearing, to	80 °C
Temperature range from	-40 °C
Isolation Contact / Contact	2500 V
Approvals	CE, Gost R, RoHS, CCC, CSA, Lloyd's, UL

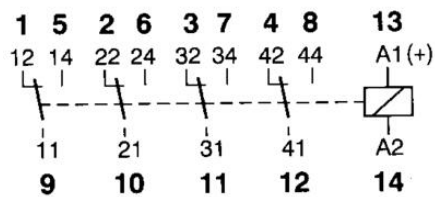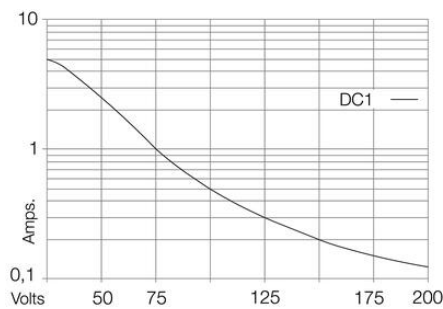

## C9-A41 04

---

AC 1.5 VA    DC 0.9 W

---

5A / 250V AC-1  
 5A / 30V DC-1

---

