

**POWER SUPPLY 1-PHASE, 12 V DC
DIMENSION Q SERIES**

QS10.121

POWER SUPPLY 12VDC 180W 15A

- Output current of 15 A
- Up to 92% efficiency
- Only 60 mm wide
- 100-240 VAC / 88-370 VDC



PRODUCT DESCRIPTION

The most outstanding features of this Dimension Q Series DIN-rail power supply are the high efficiency and the small size, which are achieved by a synchronous rectification and further novel design details. The Q Series is part of the Dimension family, existing alongside the lower featured C-Series. With short-term peak power capability of 150% and built-in large sized output capacitors, these features help start motors, charge capacitors and absorb reverse energy and often allow a unit of a lower wattage class to be used.

High immunity to transients and power surges as well as low electromagnetic emission makes usage in nearly every environment possible.


The integrated output power manager, a wide range input voltage design and virtually no input inrush current make installation and usage simple.

Diagnostics are easy due to the dry DC-ok contact, a green DC-ok LED and red overload LED.

Unique quick-connect spring-clamp terminals allow a safe and fast installation and a large international approval package for a variety of applications makes this unit suitable for nearly every situation.

For a good cooling, we recommend a clearance of 40 mm over 20 mm below. We recommend 5 mm air gap to the sides (15 mm on the sides of adjacent product is a heat source).

Output characteristics

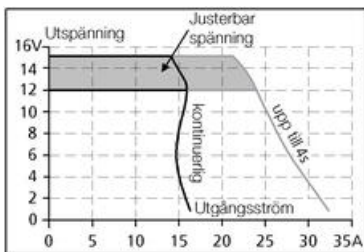

SPECIFICATIONS

Type Power Supply	AC-DC
Input voltage range	Wide-range

Power Consumption At 120 V AC	1,65 A
Input voltage AC	100-240 V
Input voltage ac min	85 V AC
Input voltage dc max	187 V DC
Input voltage DC	110-150 V
Input voltage ac max	276 V AC
Number of phases	1
Inrush current at 230 V ac typical	7 A
Power Consumption At 230 V AC	0,93 A
Supply Frequency	50-60 ±6 %
Inrush current at 120 V ac typical	4 A
Power Factor at 120 V AC, full load. Typical	0,98
Power Factor at 230 V AC, full load. Typical	0,92
Input voltage dc min	88 V DC
Ripple. max	50 mV pp
Output voltage min	12 V DC
Power Reduction Of 60 To 70 ° C	5 W/°C
Temperature Range Without Derating From	-25 °C
Output voltage	12 V DC
Output voltage max	15 V DC
Effect	180 W
Output Current	15 A
Temperature Range Without Derating To	60 °C
Lifetime at 120 V ac, full load and +40 ° C	65000 h
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	631000 h
Efficiency At 230 V AC, full load. Typical	91,8 %
Efficiency At 230 V AC. Typical	90,6 %
Lifetime at 230 V ac, full load and +40 ° C	76000 h
Efficiency At 120 V AC, full load. Typical	91,5 %
Weight	0,9 kg
Depth	117 mm
Width	60 mm

Height	124 mm
Clamp type	Spring-clamp
IP Class	IP20
DC relay output	Yes
Hold-up time at 120 V AC, full load. Typical.	32 ms
Series	Dimension Q
Hold-up time at 230 V AC, full load. Typical.	32 ms
Approvals	ABS, CB, CE, CSA, GL, UL
Material Protection	Aluminium
Active Transient	Yes

Fig. 6-1 Output voltage vs. output current, typ.

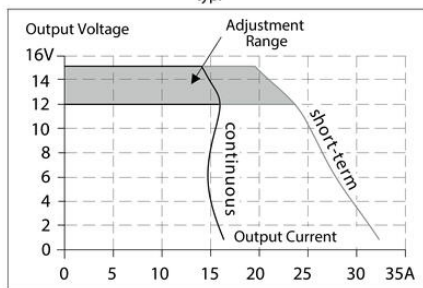


Fig. 15-1 Output current vs. ambient temp.

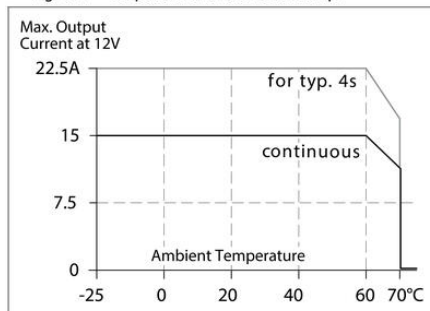


Fig. 9-2 Losses vs. output current at 12V, typ.

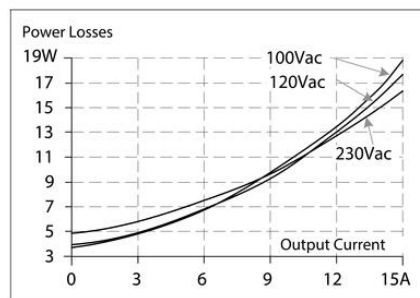


Fig. 9-1 Efficiency vs. output current at 12V, typ.


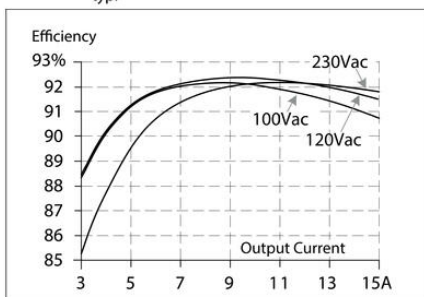


Fig. 6-2 Bonus time vs. output power

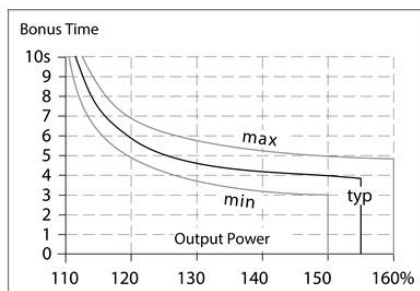

Maximal wire length *) for a fast (magnetic) tripping:

	0.75mm ²	1.0mm ²	1.5mm ²	2.5mm ²
C-2A	11m	15m	22m	35m
C-3A	10m	13m	19m	31m
C-4A	5m	8m	11m	16m
C-6A	1m	2m	3m	5m
B-6A	6m	8m	12m	18m
B-10A	2m	2m	3m	5m
B-13A	1m	1m	2m	4m

*) Don't forget to consider twice the distance to the load (or cable length) when calculating the total wire length (+ and - wire).

Fig. 13-1 Front side



Fig. 20-1 Front view

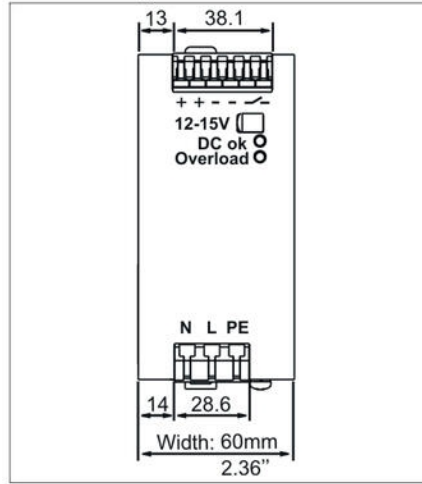


Fig. 20-2 Side view

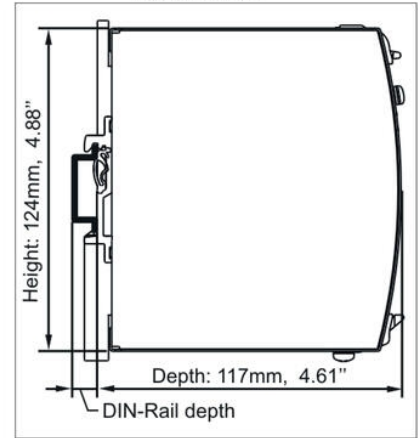


Fig. 6-1 Output voltage vs. output current, typ.

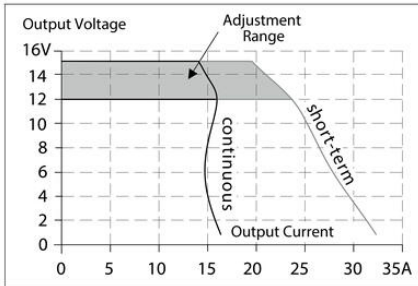


Fig. 15-1 Output current vs. ambient temp.

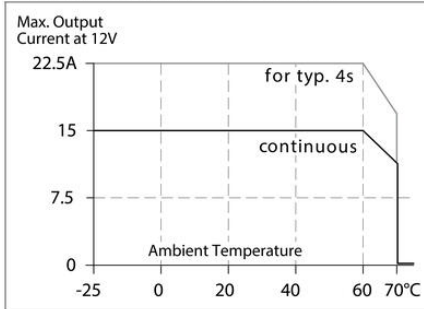


Fig. 9-2 Losses vs. output current at 12V, typ.

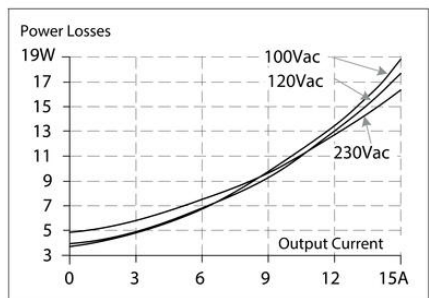


Fig. 9-1 Efficiency vs. output current at 12V, typ.


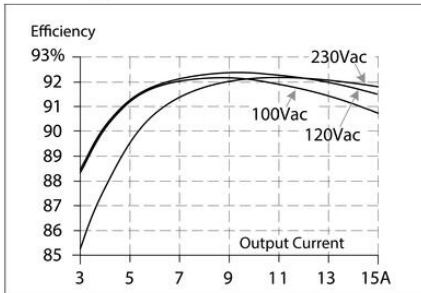


Fig. 6-2 Bonus time vs. output power

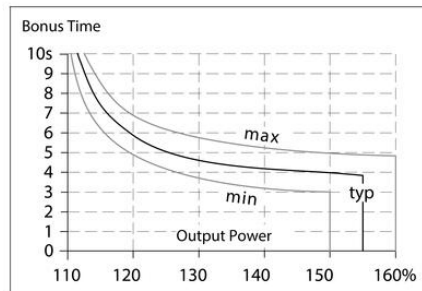

Maximal wire length *) for a fast (magnetic) tripping:

	0.75mm ²	1.0mm ²	1.5mm ²	2.5mm ²
C-2A	11m	15m	22m	35m
C-3A	10m	13m	19m	31m
C-4A	5m	8m	11m	16m
C-6A	1m	2m	3m	5m
B-6A	6m	8m	12m	18m
B-10A	2m	2m	3m	5m
B-13A	1m	1m	2m	4m

*) Don't forget to consider twice the distance to the load (or cable length) when calculating the total wire length (+ and - wire).

Fig. 13-1 Front side



Fig. 20-1 Front view

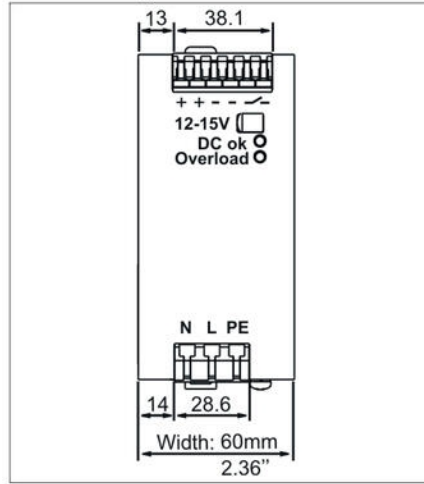


Fig. 20-2 Side view

