

**POWER SUPPLY 3-PHASE, 48 V DC  
DIMENSION Q SERIES**

QT20.481

POWER SUPPLY 48VDC 480W 10A

- Output current of 10 A
- Up to 94.8% efficiency
- High short-circuit currents
- Several protective filter
- Maximum performance



**PRODUCT DESCRIPTION**

Puls Dimension Q is a series of power supplies with very small construction dimensions and many technical advantages.

The unit has low inrush current (even during warm start), active PFC, which provides a power factor close to one, extended temperature range, as well as active protection against mains transients. Furthermore, there is a relay output (DC OK) that falls when the output voltage deviates more than 10% from the set value.

The bonus power provides 50% extra reserve with retained voltage which is an advantage when connected loads have high starting currents. The unit also provides a high short-circuit current that simplifies tripping of secondary fuses. Both the bonus power and short-circuit current is limited to 4 seconds to avoid constant overloading of the power supply and wiring.


High efficiency for long life and low temperature. The power supply can be connected for two-phase operation Within up to +40°C. At higher temperatures, the load current is reduced.

We recommend clearance of 40 mm and 20 mm below the unit and 5 mm on the sides. (15 mm on the sides if adjacent products are a heat source).


**Bonus power**

The power supply has a bonus power that enables high power output with maintained 48 V dc for 4 seconds, which is a big advantage when connected loads have high starting current, e.g. motors. How often you can use the bonus power depends on the application. With the diagram and formula below you can calculate the available repeat time for each application. Bonus power is available as soon as the power supply starts and immediately after a short circuit

Bonus power



Operating cycle



|                   |  |
|-------------------|--|
| P <sub>o</sub>    | Nominal load current                                     |
| P <sub>peak</sub> | Peak current   |
| T <sub>o</sub>    | Time between bonus power                                 |
| T <sub>peak</sub> | Peak current I time                                      |
| Operating cycle   | T <sub>peak</sub> / (T <sub>peak</sub> +T <sub>o</sub> ) |

To

 $T_{\text{peak}} - (\text{operating cycle} \cdot T_{\text{peak}}) / \text{operating cycle}$ 

E.g. 48 V DC power supply Nominal load current ( $P_o$ ) is 7.5 A. Peak current ( $P_{\text{peak}}$ ) is 12A=120 %. Peak time is 3 seconds. 7.5 A=75 % of  $I_{\text{nom}}$ . According to the diagram the operating cycle is 50%.  $T_o = 3 - (0.5 \cdot 3) / 0.5 = 3$ . Maximum repeat time of the bonus power is 3 seconds.

## SPECIFICATIONS

|  |                 |
|--|-----------------|
| Type Power Supply                            | AC-DC           |
| Input voltage range                          | Wide-range      |
| Power consumption at 400 V ac                | 0,79 A          |
| Input voltage AC                             | 380-480 V       |
| Input voltage ac min                         | 323 V AC        |
| Input voltage ac max                         | 552 V AC        |
| Inrush current at 400 V ac typical           | 3 A             |
| Number of phases                             | 3               |
| Power Factor at 400 V AC, full load. Typical | 0,94            |
| Supply Frequency                             | 50-60 $\pm 6$ % |
| Ripple. max                                  | 100 mV pp       |
| Output voltage min                           | 48 V DC         |
| Power Reduction Of 60 To 70 ° C              | 12 W/°C         |
| Temperature Range Without Derating From      | -25 °C          |
| Output voltage                               | 48 V DC         |
| Output voltage max                           | 55 V DC         |
| Effect                                       | 480 W           |
| Output Current                               | 10 A            |
| Temperature Range Without Derating To        | 60 °C           |
| MTBF (IEC 61709) 400 V ac, max loan, +40 °C  | 690000 h        |
| Lifetime at 400 V ac, full load and +40 ° C  | 51000 h         |
| Efficiency At 400 V AC, full load. Typical   | 95,4 %          |
| Efficiency At 400 V AC. Typical              | 94,4 %          |
| Weight                                       | 0,87 kg         |
| Depth  | 127 mm          |
| Width  | 65 mm           |
| Height                                       | 124 mm          |

|   |                                  |
|---|----------------------------------|
| Clamp type                                    | Spring-clamp                     |
| IP Class                                      | IP20                             |
| Hold-up time at 400 V AC, full load. Typical. | 22 ms                            |
| DC relay output                               | Yes                              |
| Series  | Dimension Q                      |
| Approvals                                     | CB, CE, CSA US, cRUus, cULus, GL |
| Material Protection                           | Aluminium                        |
| Active Transient                              | Yes                              |

Fig. 6-1 Output voltage vs. output current, typ.

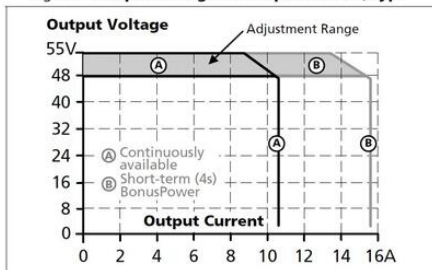


Fig. 15-1 Output current vs. ambient temp.

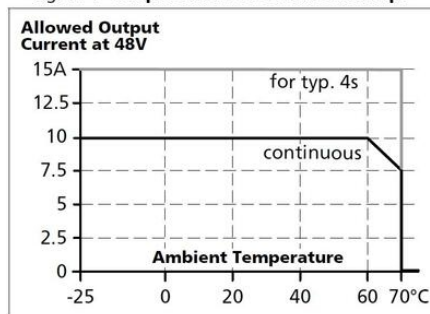


Fig. 9-1 Efficiency vs. output current at 48V, typ.


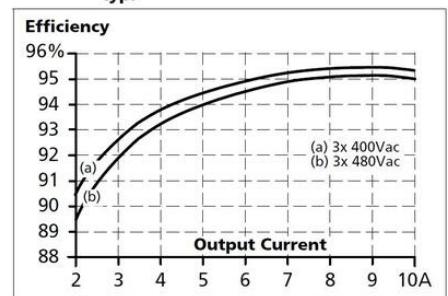



Fig. 9-2 Losses vs. output current at 48V, typ.

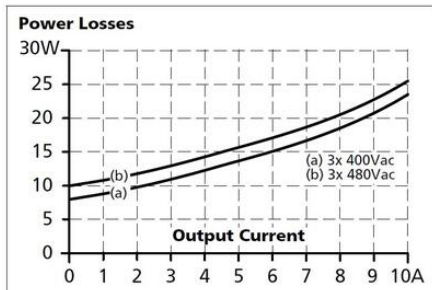

Maximal wire length<sup>1)</sup> for a fast (magnetic) tripping:

|              | 0.75mm <sup>2</sup> | 1.0mm <sup>2</sup> | 1.5mm <sup>2</sup> | 2.5mm <sup>2</sup> |
|--------------|---------------------|--------------------|--------------------|--------------------|
| <b>C-2A</b>  | 56m                 | 69m                | 104m               | 163m               |
| <b>C-3A</b>  | 34m                 | 44m                | 64m                | 48m                |
| <b>C-4A</b>  | 13m                 | 15m                | 24m                | 35m                |
| <b>C-6A</b>  | 2m                  | 4m                 | 4m                 | 9m                 |
| <b>B-6A</b>  | 16m                 | 19m                | 28m                | 42m                |
| <b>B-10A</b> | 4m                  | 7m                 | 9m                 | 15m                |
| <b>B-13A</b> | 3m                  | 4m                 | 7m                 | 10m                |

Fig. 6-2 Bonus time vs. output power

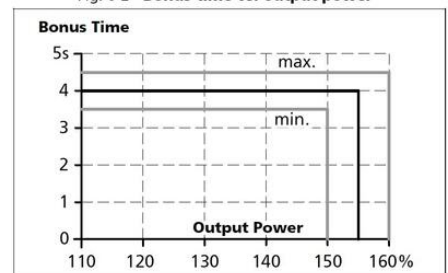

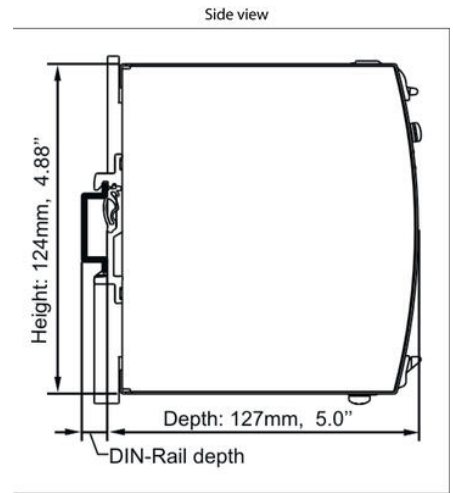
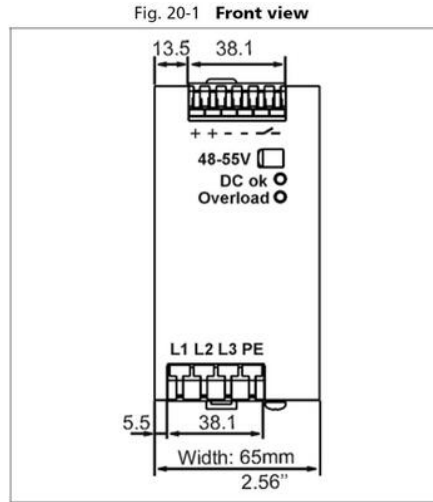


Fig. 6-1 Output voltage vs. output current, typ.

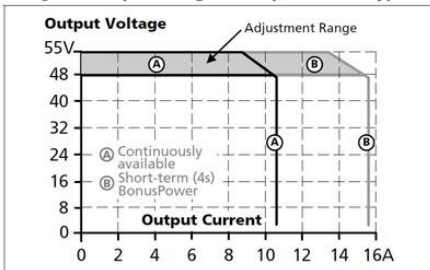


Fig. 15-1 Output current vs. ambient temp.

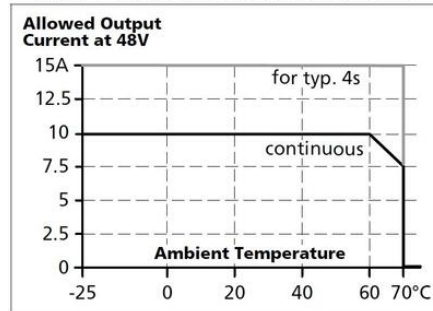


Fig. 9-1 Efficiency vs. output current at 48V, typ.


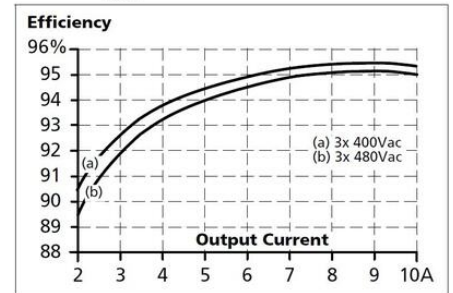


Fig. 9-2 Losses vs. output current at 48V, typ.

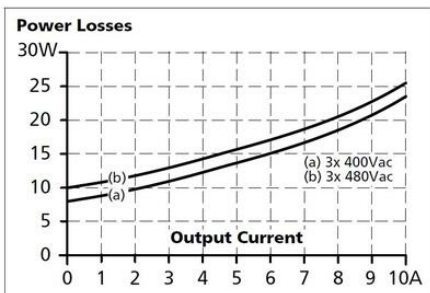

Maximal wire length<sup>1)</sup> for a fast (magnetic) tripping:

|              | 0.75mm <sup>2</sup> | 1.0mm <sup>2</sup> | 1.5mm <sup>2</sup> | 2.5mm <sup>2</sup> |
|--------------|---------------------|--------------------|--------------------|--------------------|
| <b>C-2A</b>  | 56m                 | 69m                | 104m               | 163m               |
| <b>C-3A</b>  | 34m                 | 44m                | 64m                | 48m                |
| <b>C-4A</b>  | 13m                 | 15m                | 24m                | 35m                |
| <b>C-6A</b>  | 2m                  | 4m                 | 4m                 | 9m                 |
| <b>B-6A</b>  | 16m                 | 19m                | 28m                | 42m                |
| <b>B-10A</b> | 4m                  | 7m                 | 9m                 | 15m                |
| <b>B-13A</b> | 3m                  | 4m                 | 7m                 | 10m                |

Fig. 6-2 Bonus time vs. output power

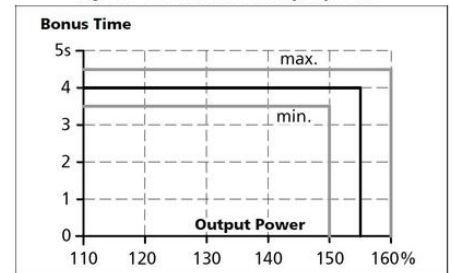


Fig. 13-1 Front side


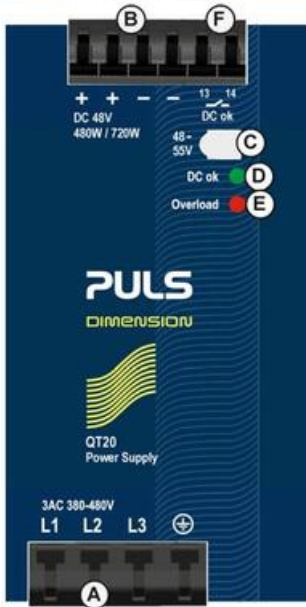


Fig. 20-1 Front view



Side view

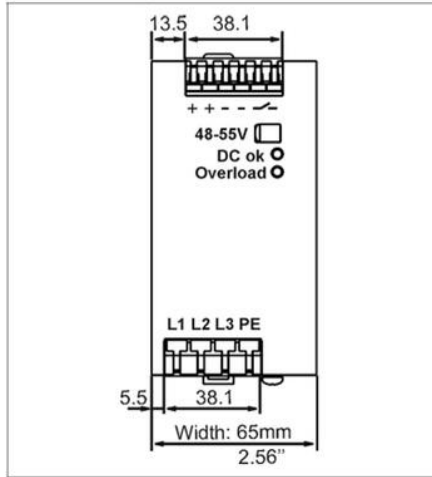