

POWER SUPPLY 1-PHASE, 36 V DC DIMENSION Q SERIES

QS40.361
POWER SUPPLY 36VDC 20A

- Width 125mm
- 94,6% efficiency
- 50 % Bonuspower 4s
- DC-OK relay, Hiccup Plus, active PFC and remote shut-down



PRODUCT DESCRIPTION

SPECIFICATIONS

Input voltage range	Wide-range
Power Consumption At 120 V AC	8,6 A
Input voltage AC	100-240 V
Input voltage ac min	90 V AC
Input voltage ac max	264 V AC
Number of phases	1
Inrush current at 230 V ac typical	11 A
Power Consumption At 230 V AC	4,5 A
Supply Frequency	50-60 ±6 %
Inrush current at 120 V ac typical	17 A
Power Factor at 120 V AC, full load. Typical	0,99
Power Factor at 230 V AC, full load. Typical	0,99
Ripple. max	130 mV pp
Output voltage min	36 V DC
Power Reduction Of 60 To 70 ° C	24 W/°C
Temperature Range Without Derating From	-25 °C

Output voltage	36 V DC
Output voltage max	42 V DC
Effect	960 W
Output Current	26,7 A
Temperature Range Without Derating To	60 °C
Lifetime at 120 V ac, full load and +40 ° C	55000 h
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	537000 h
Efficiency At 230 V AC, full load. Typical	94,6 %
Efficiency At 230 V AC. Typical	93,6 %
Lifetime at 230 V ac, full load and +40 ° C	58000 h
Efficiency At 120 V AC, full load. Typical	93,5 %
Weight	1,9 kg
Depth	127 mm
Width	125 mm
Height	124 mm
Clamp type	Spring-clamp
IP Class	IP20
DC relay output	Yes
Hold-up time at 120 V AC, full load. Typical.	27 ms
Series	Dimension Q
Hold-up time at 230 V AC, full load. Typical.	27 ms
Approvals	ABS, CB, CE, CSA, EX, GL, IECEx, UL
Material Protection	Aluminium

Fig. 6-1 Output voltage vs. output current in "single use" mode, typ.

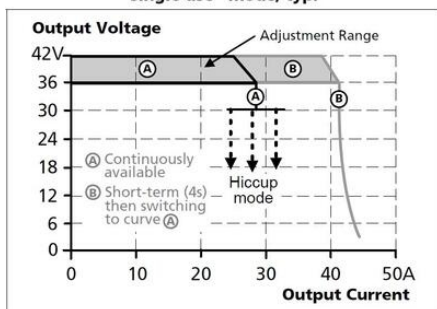


Fig. 6-4 Dynamic overcurrent capability, typ.

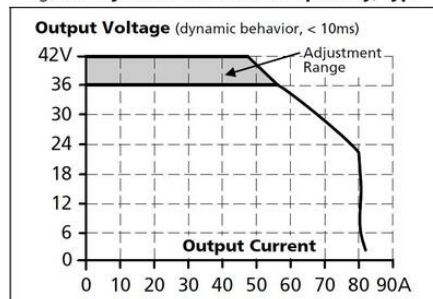


Fig. 18-1 Output current vs. ambient temp.


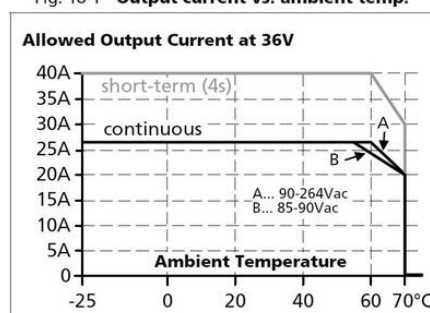


Fig. 6-3 Short-circuit on output, Hiccup^{PLUS} mode, typ.

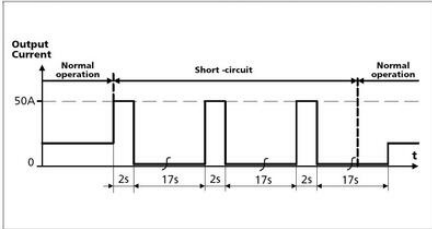

Bonus Time

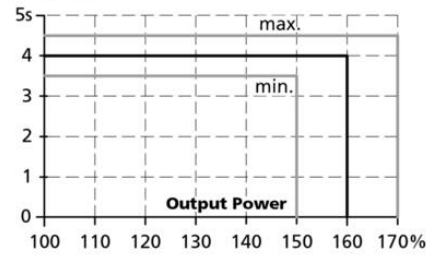


Fig. 12-1 Efficiency vs. output current at 36V, typ.

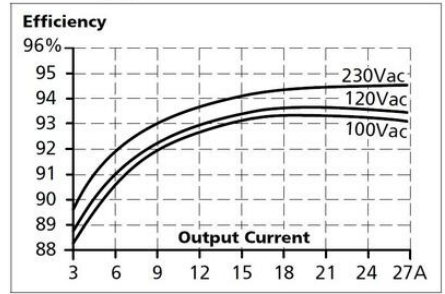


Fig. 12-2 Losses vs. output current at 36V, typ.

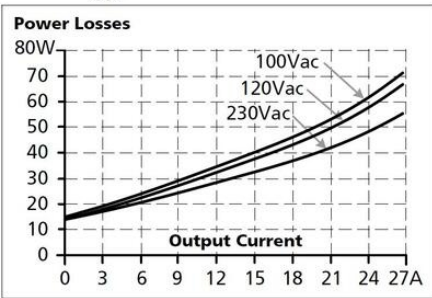


Fig. 16-1 Front side

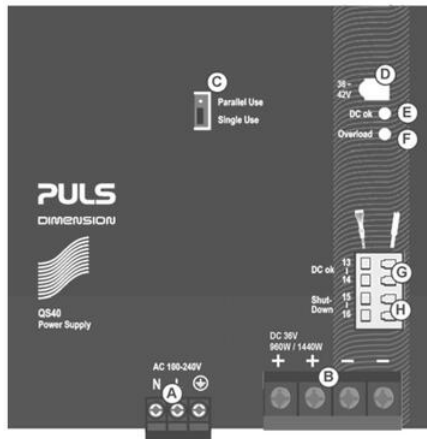


Fig. 23-1 Front view

