


MOLEX - I / O CENTRAL M8 WITH EMBEDDED CABLE

BEB401P-FBW-05
M8 MPIS BLACK BOX 4PORT 5m WSOR

- Incorporated cable
- WSOR (Weld Slag Oil Resistant) cable
- LED indication for voltage and active port
- IP67

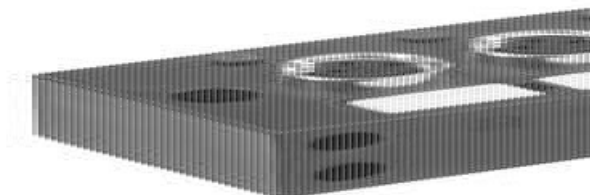

PRODUCT DESCRIPTION

SPECIFICATIONS

| | |
|------------------------------------|----------------|
| Cable length | 5 m |
| Number of poles | 3 |
| Material Cable | TPU (WSOR) |
| Connection Thread | M8 |
| Material of connection | Brass |
| Drag Chain Tested | Yes |
| IP Class | IP67 |
| LED indicator | Yes |
| Cable diameter | 7,2 +/-0,25 mm |
| Temperature Range For Use In Chain | 60 °C |
| Temperature Range The Use Of Chain | -5 °C |
| Temperature Range The Use Of | 90 °C |
| Temperature Range The Use Of | -40 °C |
| Temperature Range For Flexible Use | 80 °C |
| Temperature Range Flexible Use Of | -25 °C |
| Color Cable | Black |
| Temperature range to | 85 °C |
| Power / Port Max | 2 A |
| Temperature range from | -25 °C |

| | |
|-----------------------|---------|
| Supply Voltage DC Max | 30 V DC |
| Central Material | PBT |
| Number Of Ports | 4 |
| Supply Voltage DC Min | 10 V DC |
| Power / tot max | 6 A |

