



AUDIO GENERATOR EHS/EHF/EHL

730010405

EHL-D Elect. Sound Generator 12-24VACDC

- Electronic audio generator
- up to 118 dB
- IP65
- For demanding use




PRODUCT DESCRIPTION

Powerful aluminium cast audio generator for demanding operating conditions. For both inside and outside use. 15 different sounds. Special models on request.

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------|----------------------------------------------------------|
| Sound volume (from 1 m distance) | 118 dB, 15 different sounds |
| Material, casing | Aluminium, epoxy powder coated |
| Strand size | 2.5 mm ² |
| Operating temperature | -30 °C...+60 °C |
| Voltage | 12-24 V AC/DC, 230-240 V AC (Other voltages on order) |
| Current consumption | 600 mA (24 V AC/DC) 40 mA (230 V AC) |
| IP-class | IP65 |
| Approvals | CE, EMC, LVD |

DIMENSIONS

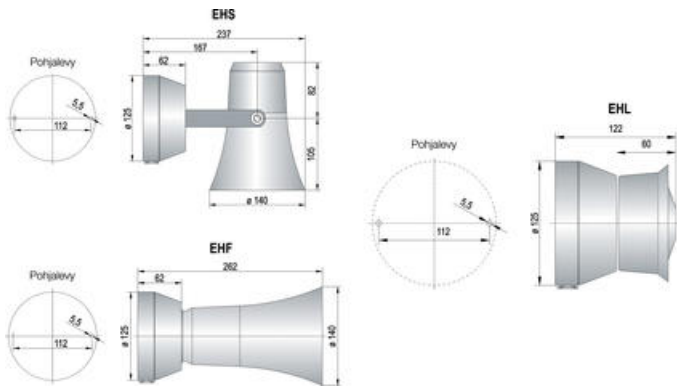

ORDER NUMBERS

| Order number | Description | Sound volume | Voltage |
|--------------|-------------|--------------|---------------|
| 730010405 | EHL-D | 108 dB | 12-24 V AC/DC |
| 730010313 | EHL-D | 108 dB | 230-240 V AC |
| 731010405 | EHS-D | 118 dB | 12-24 V AC/DC |
| 731010313 | EHS-D | 118 dB | 230-240 V AC |
| 731110405 | EHF-D | 118 dB | 12-24 V AC/DC |
| 731110313 | EHF-D | 118 dB | 230-240 V AC |

SPECIFICATIONS

| | |
|------------------------|---------|
| IP Class | IP66 |
| Sound level max | 118 dB |
| Supply Voltage DC Max | 24 V DC |
| Supply Voltage DC Min | 12 V DC |
| Temperature range from | -30 °C |
| Temperature range to | 60 °C |