



## PANEL MOUNT BEACON WITH SOUNDER, E SERIES

813511313

ELM BUZZER+LED AMBER 230VAC



- Ø 22.5mm Hole mounted panel mount buzzer with LED beacon
- 85-103 dB Range
- Continuous, Pulsing or wobble tones

### PRODUCT DESCRIPTION

The E series of panel mounted LED buzzers offers a high quality and flexible signalling solution.

- universally useable panel mount buzzer with LED control light
- sizes Ø 65 mm – Ø 45 mm
- models:

ELG-ELM panel mount buzzer – LED control light sound and light synchronized continuous tone – steady light pulsing tone – flashing light in pulse frequency wobble tone – flashing light in pulse frequency


EDG-EDM panel mount buzzer – LED control light continuous tone and steady light separately switchable

- well distinguishable tone types via terminal selectable (ELG)
- volume also in mounted condition infinitely adjustable
- LED control light – high brightness, maintenance free
- PLC fit (leakage/inrush current)
- for mounting in Ø 22 mm and 30,5 mm bore holes (with adapter)

### SPECIFICATIONS

<b>Color House</b>	Black
<b>Color Lens</b>	Orange
<b>Diameter</b>	45 mm
<b>Flash Frequency</b>	2 Hz
<b>IP Class</b>	IP65
<b>Light source</b>	LED
<b>Light type</b>	Orange LED
<b>Mounting</b>	Panel mount
<b>Nominal current max</b>	0,04 A
<b>Nominal current min</b>	0,04 A
<b>Number of tones</b>	3
<b>Operating Voltage AC Max</b>	253 V AC
<b>Operating Voltage AC Min</b>	207 V AC

Sound control	Yes
Sound level max	98 dB
Sound level min	85 dB
Supply Voltage	230 V
Temperature range from	-25 °C
Temperature range to	60 °C
Terminal connection	2,5 mm <sup>2</sup>
Tone frequency max	3500 Hz
Tone frequency min	3500 Hz
Weight	65 g

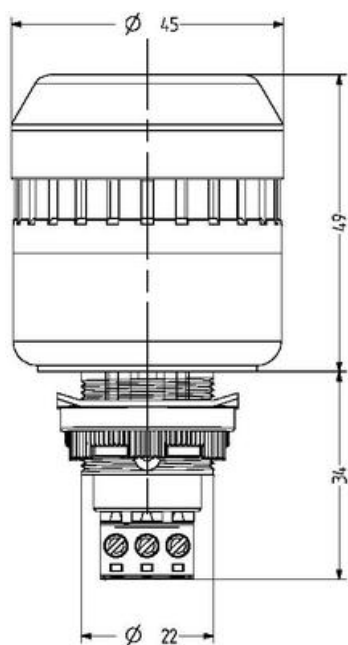

## Tone table

Tone and light selection on terminal

La	N	Lb	Tone and light synchronized
X	X		pulsing tone / LED flashing light
X	X	X	continuous tone / steady light



Justerbar volym  
med hjälp av  
potentiometer

