


EARTH TERMINALS - SNAP ON - SSL 2.5-35 MM²

SSL

17103.2

SSL 2.5/2A, 2.5mm² Snap on earth terminal

- Snap on construction
- Secure fixings on both sides of the rail
- Can be cross connected
- Material polyamide 6.6- UL94-V0
- emperature resistance -40 °C...+120 °C

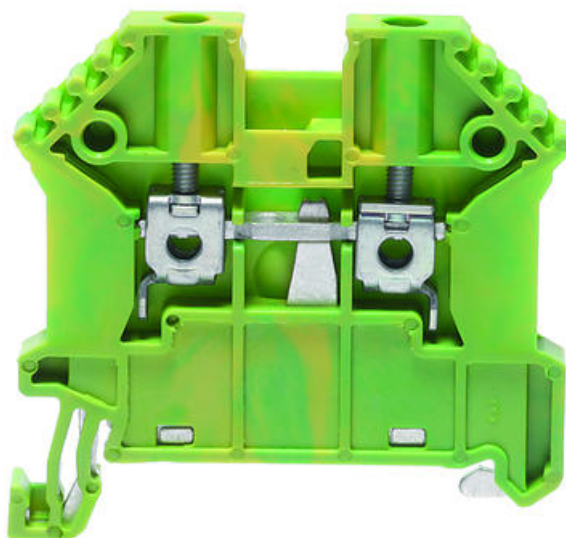

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0,2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Cross-Section	2,5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

Explosion proof	Yes
Flammability class	UL94-V0
GL test standard	IEC 60947-7-2:2009
Height TS 35/7.5	47 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-2:2009
Length	48 mm
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated wire cross section from (AWG)	30
Rated wire cross section to (AWG)	12
Screw size	M 2,5
Screw type	Slotted
Stripping Length	10 mm
Tariff code	85369010
Torque max	0,8 Nm
Torque Min	0,4 Nm
Type of terminal	Screw Terminals, DIN Rail terminals
UL test standard	UL 1059
Weight	11,51 g
Width	5 mm

