


## MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3528.2

ZIZA 1.5/3, 3 wire Initiator base terminal with foot

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

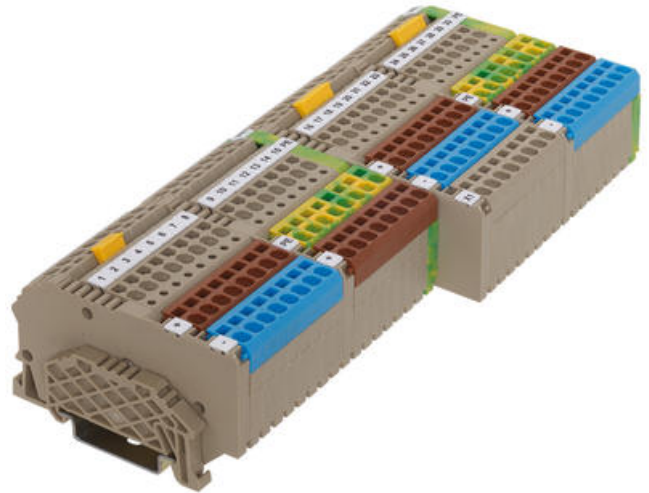

### PRODUCT DESCRIPTION

### SPECIFICATIONS

<b>Approvals</b>	UL, CSA, GL, CSA US, cUL, KEMA KUR
<b>Color</b>	Beige
<b>Connections</b>	4
<b>Contamination degree</b>	3
<b>Country of origin</b>	CZ
<b>Cross connect channels</b>	1
<b>Cross section single wire from</b>	0,5 mm <sup>2</sup>
<b>Cross section single wire to</b>	2,5 mm <sup>2</sup>
<b>Cross section stranded wire from</b>	0,5 mm <sup>2</sup>
<b>Cross section stranded wire to</b>	2,5 mm <sup>2</sup>
<b>Cross section stranded with ferrule from</b>	0,5 mm <sup>2</sup>
<b>Cross section stranded with ferrule to</b>	1,5 mm <sup>2</sup>
<b>Cross-Section</b>	1,5 mm <sup>2</sup>
<b>CSA test standard</b>	C22.2 No 158
<b>CSAus test standard</b>	UL 1059
<b>cUL test standard</b>	C22.2 No 158
<b>Flammability class</b>	UL94-V0
<b>GL test standard</b>	IEC 60947-7-1:2009

<b>Height TS 35/7.5</b>	40,5 mm
<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-1:2009
<b>Length</b>	68,7 mm
<b>Mounting</b>	TS 35/7,5
<b>Number of levels</b>	1
<b>Number of test pick off options</b>	0
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	120 °C
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A1
<b>Rated Current CSA</b>	12,5 A
<b>Rated current CSAus</b>	12,5 A
<b>Rated Current IEC</b>	17,5 A
<b>Rated impulse voltage</b>	4 kV
<b>Rated wire cross section from (AWG)</b>	26
<b>Rated wire cross section to (AWG)</b>	14
<b>Rated voltage CSAus</b>	300 V
<b>Rated Voltage IEC</b>	400 V
<b>Stripping Length</b>	8 mm
<b>Tariff code</b>	85369010
<b>UL test standard</b>	UL 1059
<b>Weight</b>	7 g
<b>Width</b>	5,1 mm
<b>Voltage CSA</b>	300 V

