


3-WIRE INSTALLATION TERMINALS - FDLI

FDLI

3283.2
FDLI 2,5-4 NT/L/PE

- Only 5.1mm wide
- Base terminal with wide range of options
- Snap on Earth on both sides
- Disconnect and fuse options

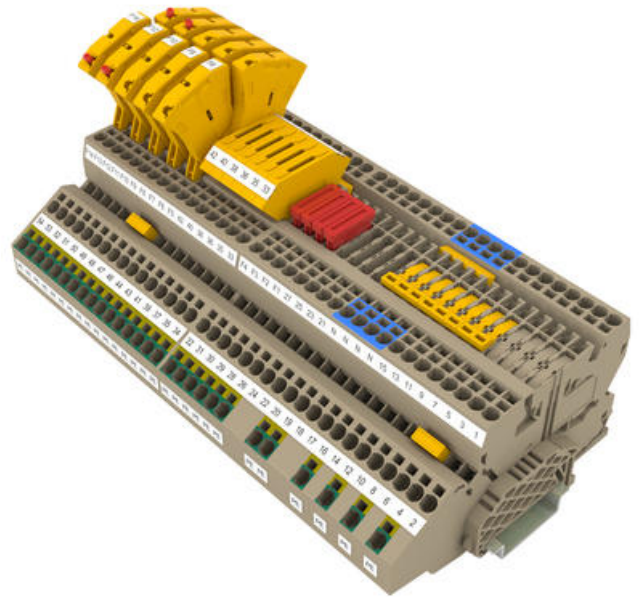

PRODUCT DESCRIPTION

The base terminals of the FDLI 2.5-4 series are available in eight different versions. This range offers you the best all round solution, whether you are using our feed-through terminals, feedthrough terminals with disconnect-blade or the empty terminal versions together with custom-fit accessories.

All can be combined together in one neat package with a uniform size to give a professional and easy to wire solution

SPECIFICATIONS

| | |
|-------------------------------------------------|---------------------|
| Approvals | EAC |
| Color | Beige |
| Connections | 5 |
| Contamination degree | 3 |
| Country of origin | DE |
| Cross connect channels | 2 |
| Cross section single wire from | 0,2 mm ² |
| Cross section single wire to | 4 mm ² |
| Cross section stranded wire from | 0,2 mm ² |
| Cross section stranded wire to | 4 mm ² |
| Cross section stranded with ferrule from | 0,2 mm ² |
| Cross section stranded with ferrule to | 2,5 mm ² |

| | |
|--------------------------------------------|-------------------|
| Cross-Section | 4 mm ² |
| EAC test standard | TR ZU 004/2011 |
| Flammability class | UL94-V0 |
| Height TS 35/7.5 | 55,6 mm |
| Insulation Material | Polyamide 6.6 |
| Length | 101 mm |
| Load Current Max | 32 A |
| Mounting | TS 35/7,5 |
| Operating temperature from | -40 °C |
| Operating temperature to | 120 °C |
| Overvoltage category | III |
| Pack Size | 50 |
| Plug gauge acc. EN 60 947-1 | A3 |
| Rated Current IEC | 18 A |
| Rated impulse voltage | 6 kV |
| Rated wire cross section from (AWG) | 26 |
| Rated wire cross section to (AWG) | 10 |
| Rated Voltage IEC | 400 V |
| Stripping Length | 12 mm |
| Tariff code | 85369010 |
| Weight | 27,25 g |
| Width | 5,1 mm |