


## FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4

FSIK 4/2A/MT BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

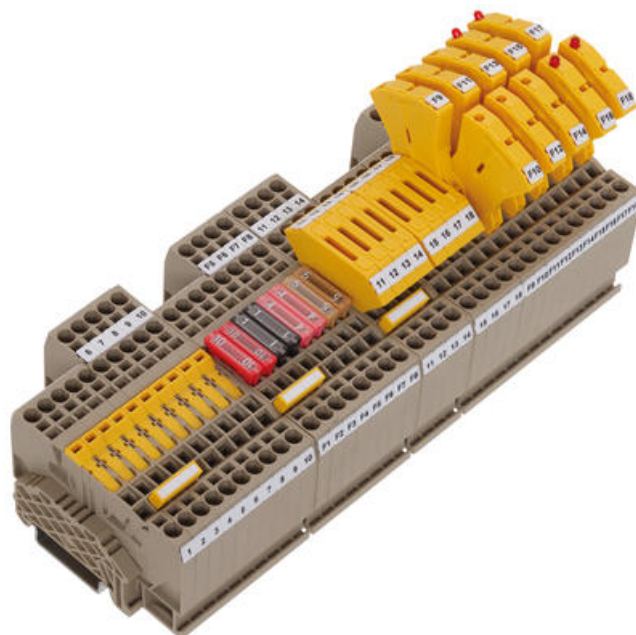

### PRODUCT DESCRIPTION

### SPECIFICATIONS

Approvals	Pending, CSA, cCSAus, KEMA KUR
Color	Black
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	1
Cross section single wire from	0,2 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0,2 mm <sup>2</sup>
Cross section stranded wire to	2,5 mm <sup>2</sup>
Cross section stranded with ferrule from	0,2 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Cross-Section	4 mm <sup>2</sup>
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059

<b>Flammability class</b>	UL94-V0
<b>Fuse size</b>	Blade Disconnect
<b>Height</b>	46 mm
<b>Height TS 35/7.5</b>	47 mm
<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-3:2009
<b>Length</b>	67,5 mm
<b>Mounting</b>	TS 35/7,5
<b>Number of levels</b>	1
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	120 °C
<b>Overvoltage category</b>	III
<b>Pack Size</b>	50
<b>Plug gauge acc. EN 60 947-1</b>	A3
<b>Rated Current</b>	18 A
<b>Rated Current CSA</b>	15 A
<b>Rated current CSAus</b>	15 A
<b>Rated Current IEC</b>	18 A
<b>Rated Current To UL</b>	15 A
<b>Rated impulse voltage</b>	6 kV
<b>Rated wire cross section from (AWG)</b>	24
<b>Rated wire cross section to (AWG)</b>	10
<b>Rated Voltage</b>	400 V
<b>Rated voltage CSAus</b>	300 V
<b>Rated Voltage IEC</b>	400 V
<b>Rated Voltage To UL</b>	300 V
<b>Rated voltage UL</b>	300
<b>Stripping Length</b>	12 mm
<b>Tariff code</b>	85369010
<b>UL test standard</b>	UL 1059
<b>Weight</b>	13,72 g
<b>Width</b>	6,1 mm
<b>Voltage CSA</b>	300 V