


PICK-OFF TERMINALS AND TEST ADAPTERS

MAG, SMAG, STA, TA, ZTA

17120.2

SMAG 4/2.5, Pick off terminal for SRK/SSL4

- STA, SMAG compatible with SRK series
- SMAG extends standard feed-through terminal up to 4 connections
- STA test adapters for SRK series
- TA test adapters for RK series
- ZTA Test adaptors for ZIZA/ZRK series

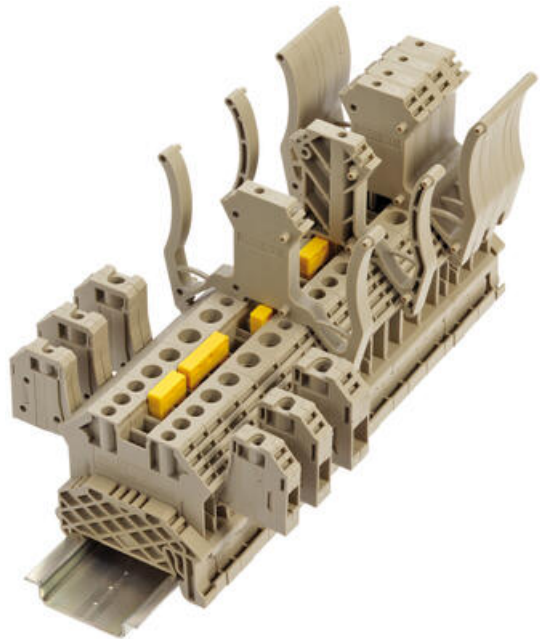

PRODUCT DESCRIPTION

CONTA-CLIP offers specific and innovative accessories for the SRK | SSL screw connection system.

Pick-off terminals SMAG

- The SMAG pick-off terminals make possible one or two additional extra wire connectors onto the SRK terminal blocks and therefore extend the standard feed-through terminal by up to four connectors.
- The SMAGs are mechanically snapped into the SRK terminal blocks.
- The SMAG busbar is connected via the corresponding base connection of the terminal block, the rated cross section is thereby reduced to the next lower size.

Test adapter STA

- The ST test adapter can be used to quickly and safely test pre-wired terminal blocks.
- A test plug block can be mounted with any number of poles using the locking pegs and the STA ZP intermediate plate with widths from 1 to 3 mm. The STA ZP intermediate plate allows the assembly of a test plug block, which can also be mounted on different block widths (SRK/SSL 2.5 | 4 | 6 | 10).
- Thanks to its innovative design the STA test adapter can be rotated through 180°. It can therefore also be mounted onto the SRK terminal block, whereby one of the cross-connection channels is already occupied by a cross-connector.

SPECIFICATIONS

Additional information	for SRK 4/2A
Approvals	EAC
Color	Beige
Connections	1
Contamination degree	3
Country of origin	DE
Cross section single wire from	0,2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Cross-Section	2,5 mm ²
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height	26,7 mm
Height TS 35/7.5	53 mm
Insulation Material	Polyamide 6.6
Length	37,8 mm
Load Current Max	32 A
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	10
Plug gauge acc. EN 60 947-1	A3
Rated Current IEC	24 A
Rated impulse voltage	8 kV
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Rated Voltage IEC	800 V
Screw size	M 2,5

Screw type	Slotted
Stripping Length	10 mm
Tariff code	85369010
Torque max	0,8 Nm
Torque Min	0,4 Nm
Type of terminal	Screw Terminals, DIN Rail terminals
Weight	6,1 g
Width	5,9 mm

