

## RQF2-M FLANGE

5020.071.225

Plastic flange.RQF2-M M25x1,5 SV

- Elbow flange with metric threads
- IP67
- Temperature range -40 °C...+120 °C






### PRODUCT DESCRIPTION


RQF2-M flange connectors with metric threads. Available also in grey color.

### SPECIFICATIONS

|                               |              |
|-------------------------------|--------------|
| <b>Hose dimension AD2</b>     | 21,2-28,5    |
| <b>Thread</b>                 | M25x1,5 Met. |
| <b>Pack Size</b>              | 50           |
| <b>IP Class</b>               | IP67         |
| <b>Color</b>                  | Black        |
| <b>Temperature range from</b> | -40 °C       |
| <b>Temperature range to</b>   | 120 °C       |
| <b>Weight kg / 100 ± 10%</b>  | 0,66         |
| <b>Material</b>               | Polyamide    |

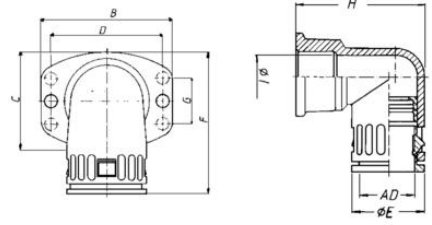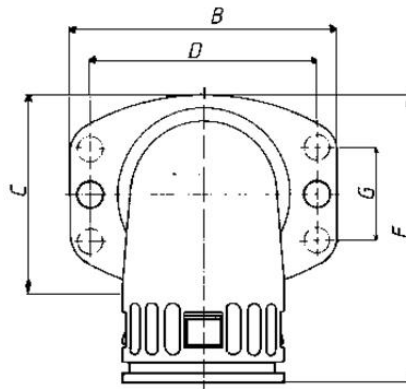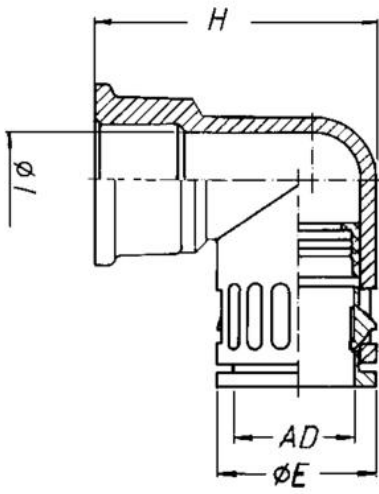

| Grey         | Black        | AD        |         | B/C | D  | G   | Ø    | Ø    | F |
|--------------|--------------|-----------|---------|-----|----|-----|------|------|---|
| 5020.071.025 | 5020.071.225 | 21,2-28,5 | M25x1,5 | 36  | -  | 5,4 | 29,5 | 15,6 |   |
| 5020.071.032 | 5020.071.232 | 28,5-34,5 | M32x1,5 | 52  | -  | 6,6 | 37   | 19,1 |   |
| 5020.071.040 | 5020.071.240 | 34,5-42,5 | M40x1,5 | 54  | 36 | 6,6 | 45   | 18,6 |   |
| 5020.071.050 | 5020.071.250 | 42,5-54,5 | M50x1,5 | 73  | 30 | 6,6 | 55   | 20   |   |
| 5020.071.050 | 5020.071.263 | 54,5      | M63x1,5 | 73  | 30 | 6,6 | 68   | 20   |   |

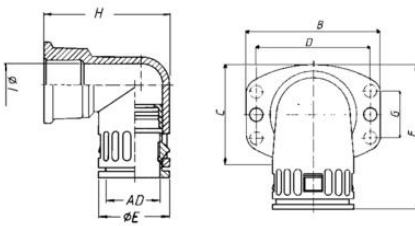

| Grey         | Black        | AD        | Metrisk | B/C   | D  | G  | Ø   | Ø    | F |
|--------------|--------------|-----------|---------|-------|----|----|-----|------|---|
| 5020.071.025 | 5020.071.225 | 21,2-28,5 | M25x1,5 | 46/32 | 36 | -  | 5,4 | 29,5 |   |
| 5020.071.032 | 5020.071.232 | 28,5-34,5 | M32x1,5 | 63/46 | 52 | -  | 6,6 | 37,0 |   |
| 5020.071.040 | 5020.071.240 | 34,5-42,5 | M40x1,5 | 67/55 | 54 | 36 | 6,6 | 45,0 |   |
| 5020.071.050 | 5020.071.250 | 42,5-54,5 | M50x1,5 | 86/64 | 73 | 30 | 6,6 | 55,0 |   |
| 5020.071.050 | 5020.071.263 | 54,5      | M63x1,5 | 86/70 | 73 | 30 | 6,6 | 68,0 |   |