

POLYESTER ENCLOSURES

4140000

Polyester EnclosureCP140 (80X75X55)

- Glass fiber reinforced
- Suitable for demanding environments
- Shock resistant
- High protection, IP65 rated




PRODUCT DESCRIPTION

Bernstein CPG and CPS enclosure ranges are manufactured from high-grade glass fibre-reinforced polyester and available in both grey (RAL7000) and black (RAL9005).

Glass reinforced polyester enclosures of very high corrosion resistance and UL94/V0 flammability rating.

SPECIFICATIONS

Width	80 mm
Height	75 mm
Depth	55 mm
IP Class	IP66
Approvals	GL, UL
Color	Grey RAL 7000
Material	Polyester
Temperature range to	80 °C
Temperature range from	-40 °C

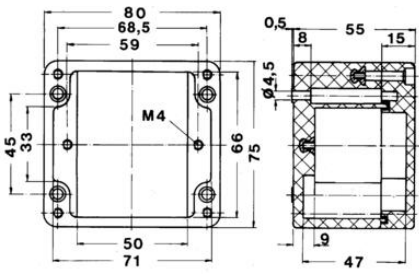

Enclosure incl. seals			
PAE seal (standard)	-40°C to +100°C	-40°C to +100°C	Enclosure material: -40°C to +140°C
CR seal	-30°C to +80°C	-30°C to +80°C	
Silicone foam seal	-40°C to +180°C	-40°C to +180°C	Enclosure material: -40°C to +140°C
Silicone full seal	-40°C to +100°C	-40°C to +100°C	
EPDM seal	-25°C to +100°C	-25°C to +100°C	Enclosure material: -40°C to +140°C
HTDMC seal	-40°C to +120°C	-40°C to +120°C	