


CAN BUS CABLE

SAB06289021/08K
CAN Bus cable 2x2x0,5 mm²

- CAN Bus cables for mobile applications
- Color coded cores according to DIN 47100

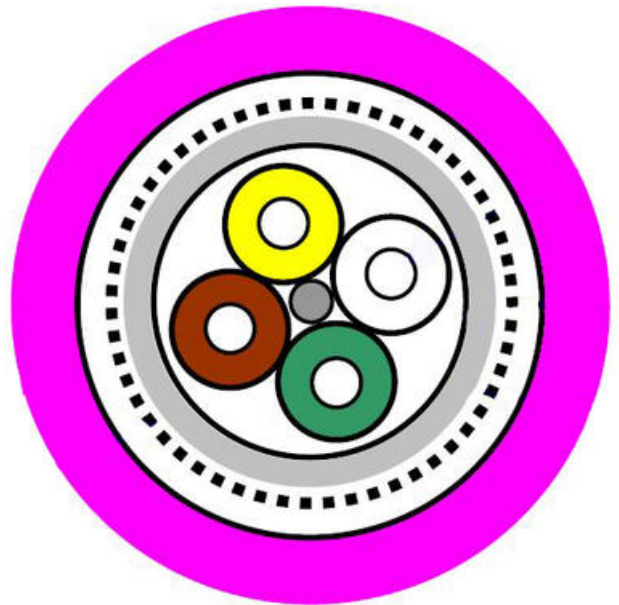

PRODUCT DESCRIPTION

S CB 628 is a halogen-free CAN-Bus cable for cable tracks with UL approval. It is used for the exchange of digital information. CAN-Bus cables are recommended as highly flexible data cables in cable tracks.

SPECIFICATIONS

Number Of leads	4
Cross-Section	0,5 mm ²
Material Outer Jacket	PUR
Shielded	Yes
Diameter Outer -5%	8,2 mm
Temperature Range The Use Of	80 °C
Temperature Range The Use Of	-40 °C
Temperature Range For Flexible Use	80 °C
Temperature Range Flexible Use Of	-35 °C
Bending Radius Fixed Laying	3xD
Bending Radius Flexible Use	10xD
Core Insulation	TPE
Core identification	Colour Coded
Approvals	UL

Halogen	Yes
Drag Chain Tested	No
Color Jacket	Violet
Twister pairs	Yes
Number of cores and cross-section mm²	2 x 2 x 0,5mm ²