

MHM5 ABSOLUTE SHAFT ENCODER

MHM510-PROF-001
Absolute encoder, Profibus

CANopen

- Diameter 58mm, shaft diameter 10mm
- Resolution (Max): 13x16 bits
- CANopen, DeviceNet, Ethercat, Ethernet/IP, Interbus, Modbus, Parallel, Profibus, Profinet
- IP64, IP66 available


PRODUCT DESCRIPTION

SPECIFICATIONS

IP Class	IP64
Shaft Diameter	10 mm
Connection Thread	Screw terminal
Temperature range to	85 °C
Housing diameter	58 mm
Temperature range from	-40 °C
Version	Multiturn
Supply Voltage DC Max	30 V DC
Output	Profibus
Supply Voltage DC Min	10 V DC
Speed max.	6000 rpm
Sensor type	Absolute
Resolution	Max. 13 bit resoluutiolle ja 12 bit kierroksille

PROGRAMMABLE PARAMETERS

Operating Parameters	This parameter determines the counting direction, in which the output code increases or decreases. As an important operating parameter the code sequence (complement) can be programmed.
Resolution per turn	Value between 1 and 8192 can be programmed.
Total resolution "Max range"	This parameter is used to program the desired number of measuring units over the total measuring range. This value may not exceed the total resolution of the absolute rotary encoder.
Preset Value	The preset value is the desired position value, which should be reached at a certain physical position of the cam.
Limit Switch, Min. and Max.	Two position values can be programmed as limit switches. By reaching these values one bit of the 32 bit process value is set to high level.
Cam	One free programmable cam can be set in the total measuring range.

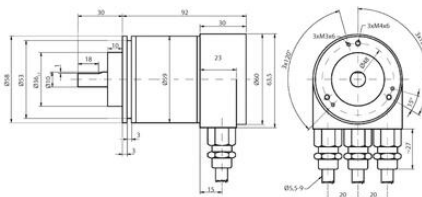

PROGRAMMABLE PARAMETERS

Operating Parameters	This parameter determines the counting direction, in which the output code increases or decreases. As an important operating parameter the code sequence (complement) can be programmed.
Resolution per turn	Value between 1 and 8192 can be programmed.
Total resolution "Max range"	This parameter is used to program the desired number of measuring units over the total measuring range. This value may not exceed the total resolution of the absolute rotary encoder.
Preset Value	The preset value is the desired position value, which should be reached at a certain physical position of the cam.
Limit Switch, Min. and Max.	Two position values can be programmed as limit switches. By reaching these values one bit of the 32 bit process value is set to high level.
Cam	One free programmable cam can be set in the total measuring range.

