

## NUVO-6108GC SERIES INDUSTRIAL COMPUTERS

N6108GC-I5

Nuvo-6108GC Intel® Core™ i5-6500

- Intel® 6th-Gen Xeon® and Core™ processors
- GPU support: up to 250W cards
- 1x PCIe x16 and 2x PCIe x8 @ x4
- 2x GigE & 4x USB 3.0



### PRODUCT DESCRIPTION

Nuvo-6108GC-IGN is one of the world's first industrial-grade in-vehicle edge AI GPU computing platform supporting high-end graphics cards. It's designed to fuel emerging GPU-accelerated applications, such as AI (artificial intelligence) inference, VR, autonomous driving and CUDA computing by accommodating 250W NVIDIA® GPU.

Leveraging Intel® C236 chipset, Nuvo-6108GC-IGN in-vehicle edge AI computing platform supports Xeon® E3 v5 or 6th-Gen Core™ i7/ i5 CPU with up to 32 GB ECC/ non-ECC DDR4 memory. It incorporates general computer I/O like Gigabit Ethernet, USB3.0 and serial ports. In addition to the x16 PCIe port for GPU installation, Nuvo-6108GC series also has two x8 PCIe slots so you can install additional high performance expansion card with high bandwidths for data collections/ analytics and communication.

Nuvo-6108GC-IGN comes with sophisticated power design to handle heavy power consumption and power transient of a 250W GPU. Furthermore, to have reliable GPU performance for industrial environments, Nuvo-6108GC series utilizes Neousys' patented design\*, a tuned cold air intake to effectively dissipate the heat generated by GPU. This unique design guarantees operation at 60°C under 100% GPU loading, making Nuvo-6108GC series extremely reliable for demanding field (such as in-vehicle condition) applications.

The new Nuvo-6108GC-IGN in-vehicle GPU computer features built-in ignition power control and two of its three 2.5" drives come with Neousys' patented easy-swap trays for simple HDD/ SSD replacement.

Features:


- Supports Intel® Xeon® E3 v5 or 6th-Gen Core™ i7/ i5 LGA1151 CPU
- Supports NVIDIA® GPU (up to 250W TDP)
- Patented thermal design for -25 °C to 60 °C rugged operation\*
- Two x8, Gen3 PCIe slots for add-on cards
- Dual GbE ports and four USB3.0 ports
- Three 2.5" SATA hard drives with RAID 0/ 1/ 5 support
- Patented easy-swap trays\* for HDD replacement
- Automatic temperature sensing and fan control
- Patented damping brackets\* to withstand 1 Grms vibration
- Built-in ignition control

### SPECIFICATIONS

<b>Chipset</b>	Intel® C236 platform controller hub
<b>DC Input</b>	1x 3-pin terminal block
<b>Depth</b>	330 mm
<b>GPU</b>	Intel® HD 530

<b>Height</b>	174 mm
<b>Memory RAM</b>	32 GB
<b>Processor</b>	Intel® Core™ i5-6500 (6M Cache, 3.2/ 3.6 GHz)
<b>Remote Control</b>	Yes
<b>Supply Voltage</b>	24 V
<b>Temperature range bearing, from</b>	-40 °C
<b>Temperature range bearing, to</b>	85 °C
<b>Temperature range from</b>	-25 °C
<b>Temperature range to</b>	60 °C
<b>Weight</b>	4,7 kg
<b>Vibration Resistance</b>	1 Grms (IEC60068-2-64)
<b>Width</b>	164 mm

Dimensions

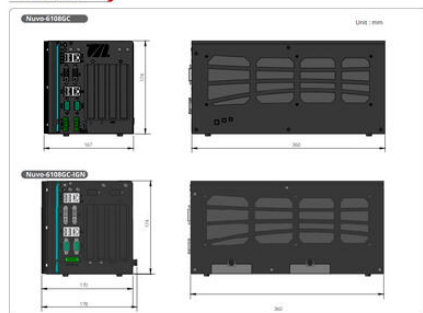

Dimensions

