


## DIRECT MOUNT SCREW TERMINALS

BAK, RD-D

1320.2

BAK 2.5/1 Beige, 2.5mm<sup>2</sup> Direct mountable compact

- Compact 2.5mm -10mm<sup>2</sup> versions snap together
- Pre-labeled versions
- RK-D 50mm -240mm<sup>2</sup> Direct mount
- External cross connectors

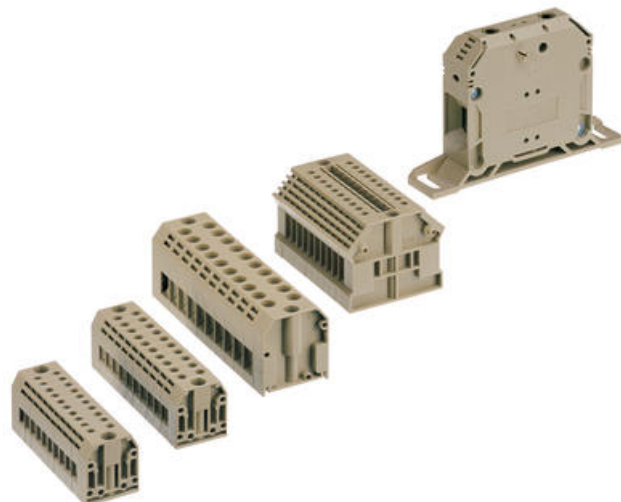

### PRODUCT DESCRIPTION

### SPECIFICATIONS

<b>Approvals</b>	UL, cUL, KEMA KUR, EAC
<b>Color</b>	Beige
<b>Connections</b>	2
<b>Contamination degree</b>	3
<b>Country of origin</b>	DE
<b>Cross section single wire from</b>	0,2 mm <sup>2</sup>
<b>Cross section single wire to</b>	4 mm <sup>2</sup>
<b>Cross section stranded wire from</b>	0,2 mm <sup>2</sup>
<b>Cross section stranded wire to</b>	4 mm <sup>2</sup>
<b>Cross section stranded with ferrule from</b>	0,2 mm <sup>2</sup>
<b>Cross section stranded with ferrule to</b>	2,5 mm <sup>2</sup>
<b>Cross-Section</b>	2,5 mm <sup>2</sup>
<b>cUL test standard</b>	C22.2 No 158
<b>EAC test standard</b>	TR ZU 004/2011
<b>Flammability class</b>	UL94-V2
<b>Height</b>	23 mm
<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-1:2009

<b>Length</b>	22 mm
<b>Mounting</b>	Direct mount
<b>Number of levels</b>	1
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	105 °C
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A3
<b>Rated current cUL</b>	20 A
<b>Rated Current IEC</b>	24 A
<b>Rated Current To UL</b>	20 A
<b>Rated impulse voltage</b>	6 kV
<b>Rated wire cross section from (AWG)</b>	22
<b>Rated wire cross section to (AWG)</b>	12
<b>Rated voltage cUL</b>	300 V
<b>Rated Voltage IEC</b>	400 V
<b>Rated Voltage To UL</b>	300 V
<b>Screw size</b>	M 2,5
<b>Screw type</b>	Slotted
<b>Stripping Length</b>	7 mm
<b>Tariff code</b>	85369010
<b>Torque max</b>	0,8 Nm
<b>Torque Min</b>	0,4 Nm
<b>UL test standard</b>	UL 1059
<b>Weight</b>	3,4 g
<b>Width</b>	5 mm

