

## FEUERSALAMANDER ENCLOSURES

20.330.160

Salamander M, stainless steel, (H29, L<50mm)



- For use in hygienically demanding applications, camera size max. 40x40mm
- Maximum lens diameter 55mm in profile, 52mm in front lid
- Inner length 101mm (S) and 151mm (M)
- Made of stainless steel, IP67 rated
- Hygienic design, chemical resistant

### PRODUCT DESCRIPTION

[Enclosure Configurator](#)

The Feuersalamander series is especially designed for use in hygienically demanding applications such as the pharmaceutical and food industry. The protective housing is suitable for compact cameras from 47x29 to 40x40mm cross-section and provide IP66 and IP67 protection with excellent heat dissipation. The enclosure is made from electro-polished, especially corrosion-resistant surgical stainless steel (AISI 316L). Hygienic design minimizes corners where dirt or germs could accumulate, the slot of the enclosure mount is covered with an FDA approved seal.

autoVimation offers a wide selection of enclosures to suit even the most specific requirements. To find a suitable enclosure please see the Enclosure Configurator (link above) or contact OEM Finland sales team for additional info!



Order Numbers:

Product ID	Camera Height	Camera Length	Enclosure Type	Length
2	29: 0   30: 1   31: 2 32: 3   33: 4   34: 5 35: 6   36: 7   38: 8 40: 9	< 50mm: 3 < 74mm: 5 < 92mm: 7	30	S: 110 M: 160

### SPECIFICATIONS

Height	85 mm
Inner length	151 mm
IP Class	IP67
Length	160 mm
Max camera height	40 mm
Max camera width	40 mm

**Max connector size** 18,5 mm

**Max lens diameter** 55 mm

**Weight** 2200 g

**Width** 69 mm



**Window seal** EPDM



Front Lid Profile S Profile M Rear Wall Mount

**Order Numbers:**

Product ID	Camera Height	Camera Length	Enclosure Type	Length
2	29: 0   30: 1   31: 2	< 50mm: 3	30	S: 110
	32: 3   33: 4   34: 5	< 74mm: 5		M: 160
	35: 6   36: 7   38: 8	< 92mm: 7		
	40: 9			

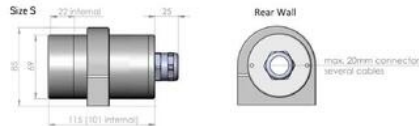

Front Lid Profile S Profile M Rear Wall Mount

**Order Numbers:**

Product ID	Camera Height	Camera Length	Enclosure Type	Length
2	29: 0   30: 1   31: 2	< 50mm: 3	30	S: 110
	32: 3   33: 4   34: 5	< 74mm: 5		M: 160
	35: 6   36: 7   38: 8	< 92mm: 7		
	40: 9			

