

## DATALOGIC - SG2-E 30 HAND

SG2-30-015-OO-E-C

Light curtain, 150/30 mm/0,2-19 m, EDM

- Hand protection (R 30), Type 2, PL d
- Anti-interference function (0.2-9 m / 0.2-19 m)
- Protective height 150-1800 mm



### PRODUCT DESCRIPTION


Datalogic safety light curtain SG2-E Hand is made for hand detection with a range of up to 19 metres. The safety light curtain is available as type 2, and maintains level PLc according to the latest safety standards, EN ISO 13849-1 and EN 62061. SG2-E Hand is an extended version from SG2-B and it has integrated manual reset /automatic reset and input for monitoring of external contactors (EDM). SG2-E Hand include also an Anti-Interference function. The Anti-Interference system consents the installation of different light curtains aligned one next to the other avoiding mutual optical interference by choosing a shorter operating distance (9m instead of 19m), without the need to install separating shields.

The safety light curtain has two safe electronic short-circuit detection outputs (PNP). If potential free contacts are needed we can offer for example Datalogic safety relay CSME. Safety light curtain supplied complete with brackets.


Datalogic has a 3 year warranty for safety light curtains.

### Application

Hand protection ( $R \leq 40$  mm)





Anti-interference function




The Anti-Interference system consents the installation of different light curtains aligned one next to the other avoiding mutual optical interference by choosing a shorter operating distance (9 m instead of 19 m), without the need to install separating shields.

## TECHNICAL DATA

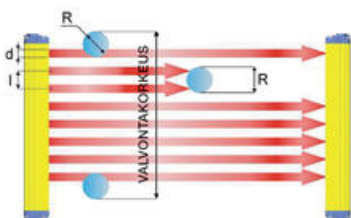


Supply voltage	24 V DC, stabilised
Tolerance	± 20 %
Max. current consumption / transmitter	2 W
Max. current consumption / receiver	3.5 W
Safe outputs (OSSD)	Transistor 2 x PNP
Max. current (OSSD)	0.5 A/each PNP
Response time	8-24 ms (depending on model, refer table "Order number")
Type of light	IR LED 950 nm
Operating distance	0.2-9 m/0.2-19 m (selection by wiring)
Protective height	150 -1800 mm
Extra functions	EDM, reset (manual/automatic), test input, Anti-interference function
Status indication	6 x LED, 7-segment LCD display
Resolution R	30 mm
Cable connection	Transmitter M12, 4-pole Receiver M12, 8-pole
Max. cable length	50 m
Material housing	Aluminium profile (RAL 1003), end caps PC makrolon

<b>Weight</b>	1.0 kg/m
<b>Protection class</b>	IP65
<b>Operating temperature</b>	0 °C to +55 °C
<b>Storage temperature</b>	-25 °C to +70 °C
<b>Safety category</b>	2 according to EN 954-1
<b>PL</b>	d according to EN ISO 13849-1
<b>SIL</b>	2 according to EN IEC 62061
<b>PFHd</b>	1.04E-08
<b>T1 (Life time in years)</b>	20
<b>MTTFd (years)</b>	273
<b>DC</b>	97.50 %
<b>SFF</b>	98.40 %
<b>Approvals</b>	


## CONNECTION

### Connection of SG2-E safety light curtain

#### Receiver



#### Transmitter



#### Receiver (Rx), 8-pole, M12-connector

1	= white	= reset / restart
2	= brown	= +24 V DC (power supply)
3	= green	= EDM activation (see below table)
4	= yellow	= EDM
5	= grey	= OSSD1 (PNP)
6	= pink	= OSSD2 (PNP)
7	= blue	= 0 V (power supply)
8	= red	= selection of reset (automatic/manual)

#### Transmitter (Tx), 4-pole, M12-connector


1	= brown	= 24 V DC (power supply)
2	= white	= TEST
3	= blue	= 0 V (power supply)
4	= black	= selection of operating distance

### Configuration of SG2-E safety light curtain

Function	Connected to	Status
Test (Tx) , pin 2	+ 24 V DC	Test ON
	Not connected or 0 V	Test OFF

Operating distance ( <b>Tx</b> ) , pin 4	+ 24 V DC	0.2 - 9 m
	Not connected or 0 V	0.2 - 19 m
Reset ( <b>Rx</b> ) , pin 1	+ 24 V DC	Reset ON
	Not connected or 0 V	Reset OFF
EDM activation ( <b>Rx</b> ) , pin 3	+ 24 V DC	EDM is OFF
	Not connected or 0 V	EDM is ON
EDM ( <b>Rx</b> ) , pin 4	NC contact from e.g. contactor	
Selection of reset mode ( <b>Rx</b> ) , pin 8	OSSD 1 (pin 5)	Automatic reset
	OSSD 2 (pin 6)	Manual reset

#### EDM connection



By EDM (External Device Monitoring) external contacts as contactor can be monitored.

## MANUAL

### SG2-E Hand

[SG2-B-E, eng](#)

## ORDER NUMBERS & DIMENSIONS

### Dimensions





Order no.	Resolution (mm)	Protective height (mm)	Number of beams	Length housing L1 / L2 (mm)	Response time (ms)	Range (m)
<b>Standard version</b>						
SG2-30-015-OO-E-C	30	150	8	233.3 / 153.3	8	0.2 - 9 / 0.2 - 19
SG2-30-030-OO-E-C	30	300	16	383.2 / 303.2	9	0.2 - 9 / 0.2 - 19

SG2-30-045-OO-E-C	30	450	24	533.2 / 453.3	11	0.2 - 9 / 0.2 - 19
SG2-30-060-OO-E-C	30	600	32	683.2 / 603.2	12	0.2 - 9 / 0.2 - 19
SG2-30-075-OO-E-C	30	750	40	833.2 / 753.3	14	0.2 - 9 / 0.2 - 19
SG2-30-090-OO-E-C	30	900	48	983.2 / 903.2	15	0.2 - 9 / 0.2 - 19
SG2-30-105-OO-E-C	30	1050	56	1133.2 / 1053.2	17	0.2 - 9 / 0.2 - 19
SG2-30-120-OO-E-C	30	1200	64	1283.3 / 1203.3	18	0.2 - 9 / 0.2 - 19
SG2-30-135-OO-E-C	30	1350	72	1433.2 / 1353.2	20	0.2 - 9 / 0.2 - 19
SG2-30-150-OO-E-C	30	1500	80	1583.3 / 1503.3	21	0.2 - 9 / 0.2 - 19
SG2-30-165-OO-E-C	30	1650	88	1733.3 / 1653.3	22	0.2 - 9 / 0.2 - 19
SG2-30-180-OO-E-C	30	1800	96	1883.3 / 1803.3	24	0.2 - 9 / 0.2 - 19



All SG2-E safety light curtains are supplied with brackets (ST-K4ROT).

## ACCESSORIES

### Mounting brackets



ST-K4ROT brackets. 1 kit (4 pcs.) supplied in the package



ST-KSTD brackets



ST-K4AV antivibration support  
use with ST-brackets



SG-LP laser pointer

**All SG2-E safety light curtains are supplied with brackets (ST-K4ROT) .**

Order no.	Description
-----------	-------------

**Cables**

CS-A1-02-U-05	Cable, M12, straight, 5 metres, female, 4-pole
CS-A1-02-U-10	Cable, M12, straight, 10 metres, female, 4-pole
CS-A1-02-U-15	Cable, M12, straight, 15 metres, female, 4-pole
CS-A1-02-U-25	Cable, M12, straight, 25 metres, female, 4-pole

CS-A1-06-U-05	Cable, M12, straight, 5 metres, female, 8-pole
CS-A1-06-U-10	Cable, M12, straight, 10 metres, female, 8-pole
CS-A1-06-U-15	Cable, M12, straight, 15 metres, female, 8-pole
CS-A1-06-U-25	Cable, M12, straight, 25 metres, female, 8-pole
CS-A1-06-U-50	Cable, M12, straight, 50 metres, female, 8-pole

**Safety relays**

CSME-03VU24-Y14	Safety relay Datalogic CSME, 3 NO, 24 V DC (this relay need EDM control from light curtain)
42010204	Safety relay Duelco NST-2004, 3 NO + 1 NC, 24 V DC

**Brackets (extra). All SG2-B safety light curtains are supplied with standard brackets (ST-K4ROT)**

ST-K4ROT	Mounting bracket, rotatable (4 pcs. / kit)
ST-KSTD	Mounting bracket, standard (4 pcs. / kit)
ST-K4OR	Angle adjustment kit $\pm 5^\circ$ (4 pcs. / kit), use with ST-KSTD
ST-K6OR	Angle adjustment kit $\pm 5^\circ$ (6 pcs. / kit), use with ST-KSTD
ST-K4AV	Antivibration support (4 pcs. / kit)
ST-K6AV	Antivibration support (6 pcs. / kit)

## SPECIFICATIONS

<b>Approvals</b>	CE, cULus, TÜV
<b>Cable Length Max</b>	50 m
<b>Contact Current Max</b>	0,5 A
<b>DC</b>	97,50%
<b>IP Class</b>	IP65
<b>Material of body</b>	Aluminium
<b>Mtffd</b>	273 year
<b>Number Of Beams</b>	8
<b>PL</b>	c (EN ISO 13849-1)
<b>Protection height</b>	150 mm
<b>Reaction time</b>	8 ms
<b>Resolution</b>	30 mm
<b>Scope</b>	0,2-19 m
<b>SIL</b>	1 (EN IEC 62061)
<b>Supply voltage</b>	24 V DC
<b>T1 (Life Time In Years)</b>	20
<b>Temperature range from</b>	0 °C
<b>Temperature range to</b>	55 °C
<b>Voltage Tolerance</b>	±20 %

