

## POWER SUPPLY 1-PHASE WITH BUILT IN REDUNDANCY, 24 V DC DIMENSION C SERIES, GENERATION 2

CP10.241-R1

Redundant PSU 100-240 V AC/24 V DC, 10 A

- Output current of 10 or 20 A
- Efficiency up to 95.2%
- 20% power reserves
- Built-in decoupling mosfet for 1+1 and n+1 redundancy
- Hot-Swap



### PRODUCT DESCRIPTION

Click below link to download the white paper

[Efficient redundancy for power supplies](#)

Also visit our page for [Redundancy Modules](#)

The Dimension CP-Series are cost optimized power supplies without compromising quality, reliability and performance. The most outstanding features of the CP20.241-R1/-R2/-R3 units are the high efficiency, electronic inrush current limitation, active PFC, wide operational temperature range and the extraordinary small size. The units include a decoupling MOSFET for building 1+1 or n+1 redundant power supply systems.

These redundancy power supplies come with three connection terminal options; screw terminals, spring-clamp terminals or plug connector terminals which allows replacement on an active application.

CP20.242-R2 version feature an enhanced DC input voltage range and the CP20.241-R2-C1 is additionally equipped with conformal coated pc-boards.

CP10.242-R2 version feature an enhanced DC input voltage range.

With high immunity to transients and power surges, low electromagnetic emission, a DC-OK signal contact for remote monitoring, and a large international approval package, makes this unit suitable for nearly every application.





- AC 100-240V Wide-range Input
- $f$ Width only 39 or 48 mm  $f$
- Built-in Decoupling Mosfet for 1+1 and n+1 Redundancy
- Efficiency up to 94.7%  $f$
- 20% Output Power Reserves  $f$
- Safe HiccupPLUS Overload Mode
- Easy Fuse Breaking – 3 times nominal current for 12ms  $f$
- Active Power Factor Correction (PFC)
- $f$ Minimal Inrush Current Surge  $f$
- DC-OK Relay Contact  $f$
- Current Sharing Feature Included
- 3 Year Warranty

### SPECIFICATIONS

<b>Input voltage range</b>	Wide-range
<b>Number of phases</b>	1
<b>Input voltage AC</b>	100-240 V

<b>Input voltage ac min</b>	85 V AC
<b>Input voltage ac max</b>	264 V AC
<b>Input voltage DC</b>	110-150 V
<b>Input voltage dc min</b>	88 V DC
<b>Input voltage dc max</b>	180 V DC
<b>Inrush current at 120 V ac typical</b>	6 A
<b>Input current at 230 V ac typical</b>	9 A
<b>Power Factor at 120 V AC, full load. Typical</b>	0,99
<b>Power Factor at 230 V AC, full load. Typical</b>	0,97
<b>Supply Frequency</b>	50-60 ±6 %
<b>Power Consumption At 120 V AC</b>	2,17 A
<b>Power Consumption At 230 V AC</b>	1,14 A
<b>Output voltage</b>	24 V DC
<b>Output voltage min</b>	24 V DC
<b>Output voltage max</b>	28 V DC
<b>Output Current</b>	10 A
<b>Effect</b>	240 W
<b>Power Reduction Of 60 To 70 ° C</b>	6 W/°C
<b>Ripple. max</b>	50 mV pp
<b>Temperature Range Without Derating From</b>	-25 °C
<b>Temperature Range Without Derating To</b>	60 °C
<b>Efficiency At 120 V AC, full load. Typical</b>	93 %
<b>Efficiency At 230 V AC. Typical</b>	93,9 %
<b>Efficiency At 230 V AC, full load. Typical</b>	94,7 %
<b>Lifetime at 120 V ac, full load and +40 ° C</b>	78000 h
<b>Lifetime at 230 V ac, full load and +40 ° C</b>	109000 h
<b>MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C</b>	641000 h
<b>Width</b>	39 mm
<b>Height</b>	124 mm
<b>Depth</b>	117 mm
<b>Weight</b>	0,6 kg

Clamp type	Spring-clamp
Series	Dimension C
Approvals	ATEX, CE, CSA US, cULus, IECEx
DC relay output	Yes
Material Protection	Aluminium
Hold-up time at 120 V AC, full load. Typical.	37 ms
Hold-up time at 230 V AC, full load. Typical.	37 ms
IP Class	IP20
Active Transient	Yes

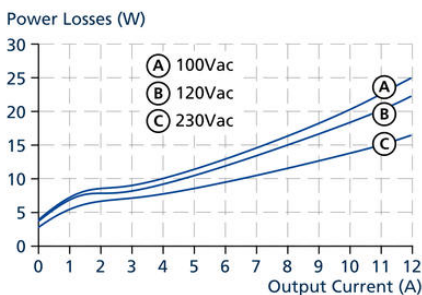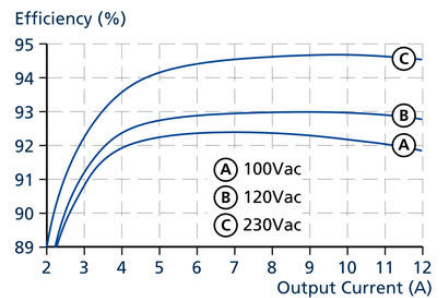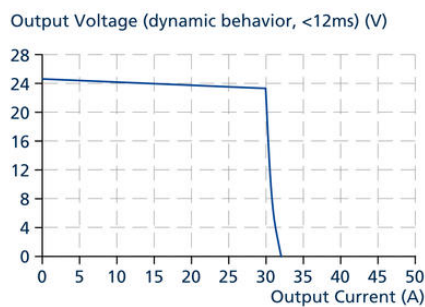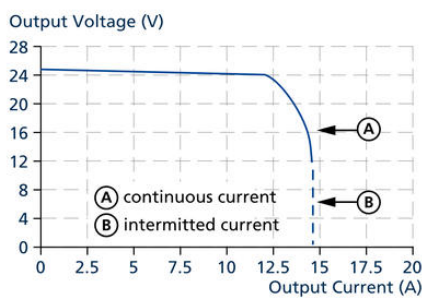

Maximal wire length<sup>\*)</sup> for a fast (magnetic) tripping:

	0.75mm <sup>2</sup>	1.0mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
C-2A	30 m	37 m	54 m	84 m
C-3A	25 m	30 m	46 m	69 m
C-4A	9 m	15 m	25 m	34 m
C-6A	3 m	3 m	4 m	7 m
C-8A				
B-6A	12 m	15 m	21 m	34 m
B-10A	3 m	3 m	4 m	9 m
B-13A	2 m	2 m	3 m	6 m

\*) Don't forget to consider twice the distance to the load (or cable length) when calculating the total wire length (+ and - wire).

