



CAL 9500P

95001PA008

CONTROLLER.IN:STD,UT:SSD/RELAY

- PID controller equipped with bright LED display
- Display indicates default and measured values
- Easy to program
- 3 outputs by default
- Analog input and output options available





PRODUCT DESCRIPTION


SPECIFICATIONS

Approvals	CE, CSA, EMC, UL, FM
Digit Height	10 mm
Digital signal in	No
Frequenze	50-60 Hz
IP Class	IP66
Material Protection	Polycarbonate
Mounting	Panel mount
Number Of Digits	4
Output	Logic (SSR), 2x Relay
Panel size	48x48 mm
Power Supply AC max	264 V
Power Supply AC min	90 V
Temperature resistance housing to	50 °C
Weight	180 g




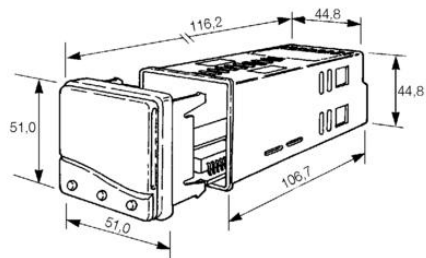


Modellbeteckningar
95111




95001






95221




95B11 = 4-20mA
95C11 = 0-5V
95D11 = 0-10V




95B21 = 4-20mA
95C21 = 0-5V
95D21 = 0-10V

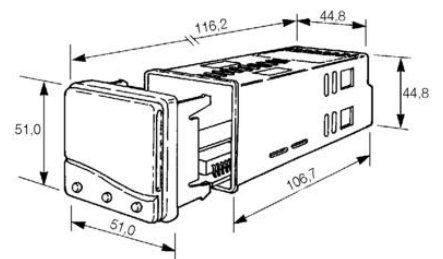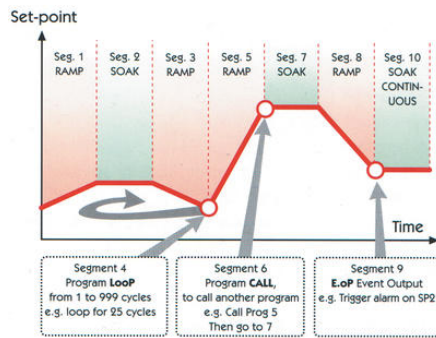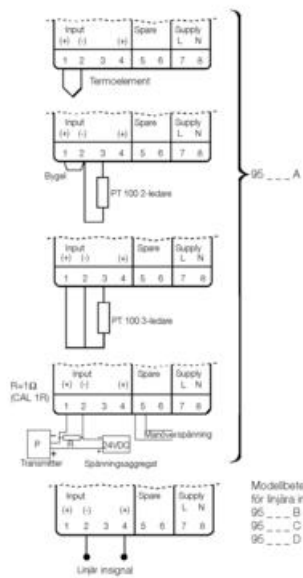





Modellbeteckningar
95111




95001




95221



95B11 = 4-20mA
95C11 = 0-5V
95D11 = 0-10V



95B21 = 4-20mA
95C21 = 0-5V
95D21 = 0-10V

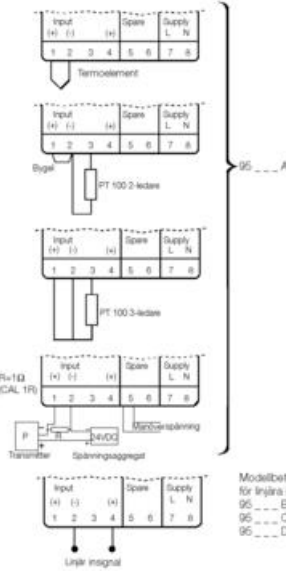

Modellbeteckningar
för linjära insgånar
95... B = 4-20mA
95... C = 0-5V
95... D = 0-10V