

POWER SUPPLY 1-PHASE, 12 V DC MINILINE SERIES

ML30.101
PULS PSU 30W 5-5.5VDC

- Output current of 2.5 A or 4.2 A
- High efficiency
- Space-saving
- Manages high starting/overload currents
- Spring connection





PRODUCT DESCRIPTION

Puls series Miniline is characterised by compact dimensions, reliability and long lifetime with high efficiency, which entails low energy loss and low temperatures in the switch cabinet. The power supply units are just 45 mm wide and feature spring connection, which means faster installation. For more technical information, consult the **general information** at the beginning of the power supply section.

SPECIFICATIONS

Input voltage range	Wide-range
Number of phases	1
Input voltage AC	100-240 V
Input voltage ac min	85 V AC
Input voltage ac max	264 V AC
Input voltage DC	110-300 V
Input voltage dc min	85 V DC
Input voltage dc max	370 V DC
Inrush current at 120 V ac typical	17 A
Inrush current at 230 V ac typical	35 A
Power Factor at 120 V AC, full load. Typical	0,51
Power Factor at 230 V AC, full load. Typical	0,44
Supply Frequency	50-60 ±6 %

Power Consumption At 120 V AC	0,6 A
Power Consumption At 230 V AC	0,35 A
Type Power Supply	AC-DC
Output voltage	5 V DC
Output voltage min	5 V DC
Output voltage max	5,5 V DC
Output Current	5 A
Effect	25 W
Power Reduction Of 60 To 70 ° C	0,5 W/°C
Ripple. max	50 mV pp
Temperature Range Without Derating From	-10 °C
Temperature Range Without Derating To	60 °C
Efficiency At 230 V AC, full load. Typical	80 %
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	1963000 h
Width	45 mm
Height	75 mm
Depth	91 mm
Weight	0,24 kg
Clamp type	Spring-clamp
Series	Miniline
Approvals	CB, CE, CSA, GL, NEC Class 2, UL
Material Protection	ABS plastic
Hold-up time at 120 V AC, full load. Typical.	22 ms
Hold-up time at 230 V AC, full load. Typical.	170 ms
IP Class	IP20

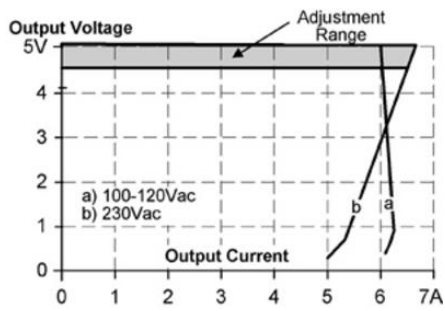

PE N L
12.1 20.8
Width: 45mm
1.77"

Height: 75mm, 2.95"
Depth: 91mm, 3.58"
DIN-Rail depth